

LINIO NEON 0612X SV

Outdoor · Horizontal Bending · Static White

Features

- Smooth diffusion, premium silicone material offers incredible flexibility
- IP67 rated, ideal for outdoor uses
- 5 years warranty

Applications

Gardens, parks, hotels, facades, pathways, outdoor steps, etc.



RoHS

ONE
BIN24V
DC

Date



Fixture type

Project name

Project phase



Dimensions

Standard
3.28ft (1m)Cutttable every
1.97in. (50mm)

Order Code

Model	Environment	Voltage	CCT	Power	End Cap	Left Feed Entry
N0612XSV	W7-Wet (IP67)	24-DC24V	22-2200K 27-2700K 30-3000K 35-3500K 40-4000K 53-5300K	293~2.93W/ft	IJ Injected (IP67) IJC Clear injected (IP67) SEC Silicone (IP67)	F Front OW Open wire 3.28ft (1m) B Bottom MC Male connector with 0.98ft (30cm) cable S Side FC Female connector with 0.98ft (30cm) cable C Closed NA Only for Closed Feed Entry

*Injected and clear injected end cap are factory-made only.

Assembly Builder

Right Feed Entry				Length	
F	Front	OW	Open wire 3.28ft (1m)	Max. nominal	39.4ft (12m)
B	Bottom	MC	Male connector with 0.98ft (30cm) cable	Increment	1.97in. (50mm)
S	Side	FC	Female connector with 0.98ft (30cm) cable		
C	Closed	NA	Only for Closed Feed Entry		

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page.

Lumen Output (lm/ft)

Temp./Color	2.93W/ft
2200K	103
2700K	116
3000K	125
3500K	125
4000K	120
5300K	116
Max. Run for Class 2	22.9ft (7m)
Max. Run Supported Length	39.4ft (12m)

*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details


Efficacy	41lm/W @4000K 2.93W
CRI	Ra ≥ 90
Beam Angle	110°
LED MacAdam	2 steps
IK Rating	IK07
Average Life (L70)	> 54,000 hours
Storage Temperature	-40-140°F (-40°C~ 60°C)
Operating Temperature	-40-113°F (-40°C~ 45°C)

LINIO NEON 0612X SV

Outdoor · Horizontal Bending · Static White

Photometry

LN0612XSV-W7-24-30-293-IJ-F-OW-F-OW
LINIO NEON 0612X SV, Horizontal Bend, 3000K, 2.93W/ft

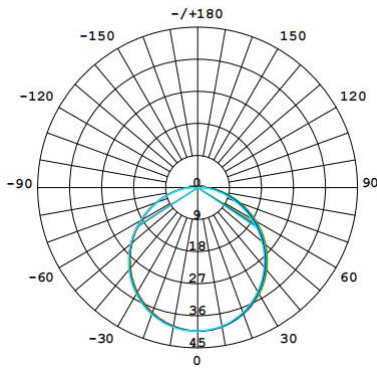

AVERAGE BEAM ANGLE(50%):114.4 DEG


Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	31.3	25.1%
0-40	51.4	41.2%
0-60	91.5	73.3%
0-90	121.1	96.9%
0-180	125	100%


UNIT: CD
— C0/180, 115.0
— C30/210, 115.1
— C60/240, 114.3
— C90/270, 113.2

Feed Entry / End Cap Options


IJJ: Injected end cap – IP67, factory-made only

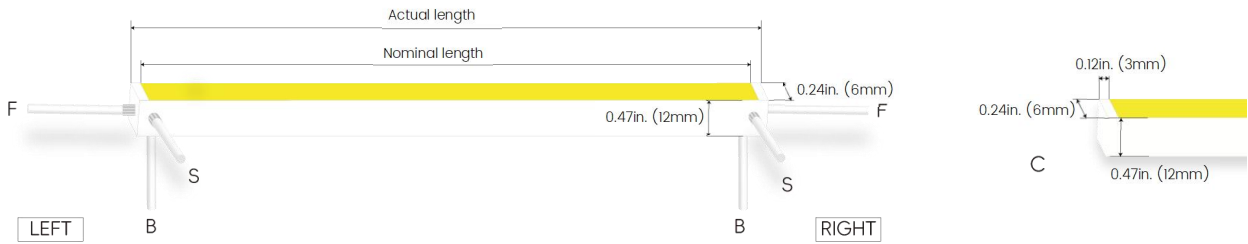

IJC: Clear injected end cap – IP67, factory-made only

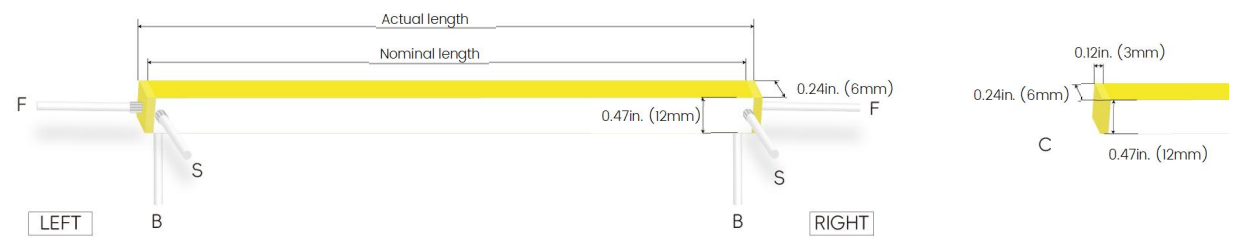

SEC: Silicone end cap – IP67

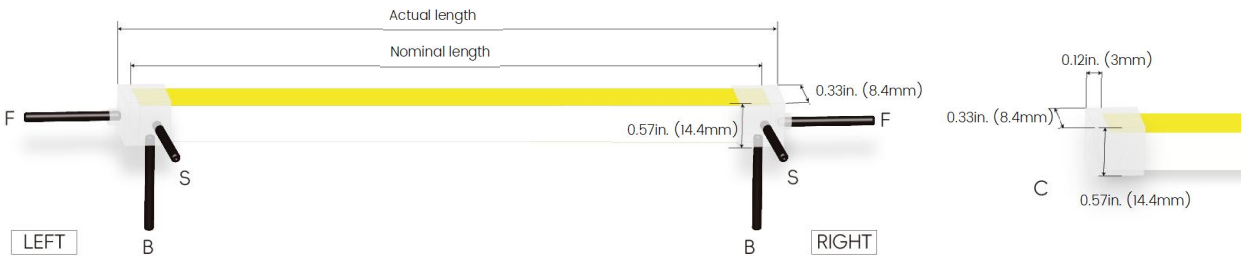


Connector Wire Options



OW: Open wire, **Dry** only
Standard 3.28ft (1m), 20 AWG (wire length customizable)



MC: Male connector, **Wet**
Standard 0.98ft (30cm), 20 AWG






FC: Female connector, **Wet**
Standard 0.98ft (30cm), 20 AWG

LINIO NEON 0612X SV



Outdoor · Horizontal Bending · Static White

Mounting Options



LN0612-SC

Name	Straight surface channel
Material	Aluminum
Standard Length	3.28ft (1M)



LN0612-CL

Name	Mounting clip
Material	Aluminum
Standard Length	0.59in. (15mm)

End Caps (Optional, purchase for extra)



LN0612-SEC-C
Silicone closed end cap



LN0612-SEC-F-2P
Silicone end cap front entry with 0.98ft (30cm) cable, 2 pin



LN0612-SEC-S-2P
Silicone end cap side entry with 0.98ft (30cm) cable, 2 pin



LN0612-SEC-B-2P
Silicone end cap bottom entry with 0.98ft (30cm) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 20 AWG



FCW-2P-67
Female connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 20 AWG



MCB-2P-67
Male connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 20 AWG



FCB-2P-67
Female connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 20 AWG

LINIO NEON 0612X SV

Outdoor · Horizontal Bending · Static White

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

LINIO NEON 0612X SV

Outdoor · Horizontal Bending · Static White

Wiring Diagram


Non-dimmable



Phase cut/Triac-dimmable



4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

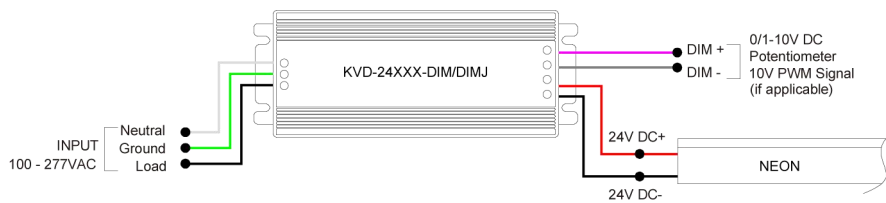

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



LINIO NEON 0612X SV

Outdoor · Horizontal Bending · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG
5W / 0.2A	1730 ft (527.3 m)	784 ft (238.9 m)	397 ft (121.0 m)	263 ft (80.2 m)	175 ft (53.3 m)	131 ft (39.9 m)	107 ft (32.6 m)
10W / 0.4A	865 ft (263.6 m)	392 ft (119.4 m)	199 ft (60.7 m)	132 ft (40.2 m)	88 ft (26.8 m)	66 ft (20.1 m)	54 ft (16.5 m)
15W / 0.6A	577 ft (175.9 m)	261 ft (79.6 m)	132 ft (40.2 m)	88 ft (26.8 m)	58 ft (17.7 m)	44 ft (13.4 m)	36 ft (11.0 m)
20W / 0.8A	433 ft (132.0 m)	196 ft (59.7 m)	99 ft (30.2 m)	66 ft (20.1 m)	44 ft (13.4 m)	33 ft (10.1 m)	27 ft (8.2 m)
25W / 1.0A	346 ft (105.5 m)	157 ft (47.9 m)	79 ft (24.1 m)	53 ft (16.2 m)	35 ft (10.7 m)	26 ft (7.9 m)	22 ft (6.7 m)
30W / 1.3A	289 ft (88.1 m)	131 ft (39.9 m)	66 ft (20.1 m)	44 ft (13.4 m)	29 ft (8.8 m)	22 ft (6.7 m)	18 ft (5.5 m)
35W / 1.5A	248 ft (75.6 m)	112 ft (34.1 m)	57 ft (17.4 m)	38 ft (11.6 m)	25 ft (7.6 m)	19 ft (5.8 m)	15 ft (4.6 m)
40W / 1.7A	217 ft (66.1 m)	98 ft (29.9 m)	50 ft (15.2 m)	33 ft (10.1 m)	22 ft (6.7 m)	16 ft (4.9 m)	13 ft (4.0 m)
45W / 1.9A	192 ft (58.5 m)	87 ft (26.5 m)	44 ft (13.4 m)	29 ft (8.8 m)	19 ft (5.8 m)	14 ft (4.3 m)	12 ft (3.7 m)
50W / 2.1A	173 ft (52.7 m)	78 ft (23.8 m)	40 ft (12.2 m)	26 ft (7.9 m)	18 ft (5.5 m)	13 ft (4.0 m)	11 ft (3.4 m)
55W / 2.3A	157 ft (47.9 m)	71 ft (21.6 m)	36 ft (11.0 m)	24 ft (7.3 m)	16 ft (4.9 m)	12 ft (3.7 m)	10 ft (3.0 m)
60W / 2.5A	144 ft (43.9 m)	65 ft (19.8 m)	33 ft (10.1 m)	22 ft (6.7 m)	15 ft (4.6 m)	11 ft (3.4 m)	9 ft (2.7 m)
65W / 2.7A	133 ft (40.5 m)	60 ft (18.3 m)	30 ft (9.1 m)	20 ft (6.1 m)	14 ft (4.3 m)	10 ft (3.0 m)	8 ft (2.4 m)
70W / 2.9A	124 ft (37.8 m)	56 ft (17.1 m)	28 ft (8.5 m)	19 ft (5.8 m)	13 ft (4.0 m)	10 ft (3.0 m)	8 ft (2.4 m)
75W / 3.1A	116 ft (35.4 m)	52 ft (15.9 m)	26 ft (7.9 m)	17 ft (5.2 m)	12 ft (3.7 m)	9 ft (2.7 m)	7 ft (2.1 m)
80W / 3.3A	109 ft (33.2 m)	49 ft (14.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	11 ft (3.4 m)	8 ft (2.4 m)	7 ft (2.1 m)
85W / 3.5A	103 ft (31.4 m)	46 ft (14.0 m)	23 ft (7.0 m)	15 ft (4.6 m)	10 ft (3.0 m)	8 ft (2.4 m)	6 ft (1.8 m)
90W / 3.8A	97 ft (29.6 m)	44 ft (13.4 m)	22 ft (6.7 m)	15 ft (4.6 m)	10 ft (3.0 m)	7 ft (2.1 m)	6 ft (1.8 m)
96W / 4.0A	91 ft (27.7 m)	41 ft (12.5 m)	21 ft (6.4 m)	14 ft (4.3 m)	9 ft (2.7 m)	7 ft (2.1 m)	6 ft (1.8 m)