

LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending

Features

- UGR<19 creates soft lighting for ultimate eye comfort
- IP67 rated, ideal for outdoor uses
- 5 years warranty


Applications

Hotels, offices, schools, libraries, clubs, lobbies, etc.




Date	Fixture type
Project name	Project phase

Dimensions (Vertical Bending · Horizontal Bending)




Bending Directions & Diameters

TV - Top View (Vertical Bending)



*Horizontal bending and 3D bending are prohibited.

SV - Side View (Horizontal Bending)



*Vertical bending and 3D bending are prohibited.

Order Code

Model	Environment	Voltage	CCT	Power	End Cap		Left Feed Entry	
LN1617TVN	W7-Wet (IP67)	24-DC24V	22-2200K	293-2.93W/ft	IJ	Injected (IP67)	F	Front
LN1617SVN			27-2700K	439-4.39W/ft	IJC	Clear injected (IP67)	B	Bottom
			30-3000K		SEC	Silicone (IP67)	S	Side
			35-3500K		MEC	Mechanical with screws (IP67)	C	Closed
			40-4000K				J	Jumper
			53-5300K					

*Injected and clear injected end cap are factory-made only.

Assembly Builder

Front	OW	Open wire 3.28ft (1m)
Bottom	MC	Male connector with 0.98ft (30cm) cable
Side	FC	Female connector with 0.98ft (30cm) cable
Closed	NA	Only for Closed Feed Entry
Jumper		

*Jumper feed entry must be used in conjunction for wire-in and wire-out directions.

Assembly Builder

Right Feed Entry				Length	
F	Front	OW	Open wire 3.28ft (1m)	Max. nominal	65.6ft (20m)
B	Bottom	MC	Male connector with 0.98ft (30cm) cable	*For 2.93W/ft	
S	Side	FC	Female connector with 0.98ft (30cm) cable	Max. nominal	49ft (15m)
C	Closed	NA	Only for Closed Feed Entry	*For 4.39W/ft	
J	Jumper			Increment	1.97in. (50mm)

*Jumper feed entry must be used in conjunction for wire-in and wire-out directions.

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code



Please select on the Mounting Options page.

LINIO NEON 1617 NOX Static White Outdoor · Vertical Bending · Horizontal Bending

Lumen Output (lm/ft)				
Temp./Color	Vertical Bending		Horizontal Bending	
	2.93W/ft	4.39W/ft	2.93W/ft	4.39W/ft
■ 2200K	47	71	40.5	60.3
■ 2700K	52	78	43.8	66
■ 3000K	57	79	48.9	70.2
■ 3500K	55	83	49.5	70.5
■ 4000K	55	81	48.6	69.9
■ 5300K	55	79	48	69
Max. Run for Class 2*		19.7ft (6m)		
Max. Run Supported Length		42.6ft (13m)		
*Typically installations in USA and Canada comply with Class 2 requirements.				

Technical Details		
	Vertical Bending	Horizontal Bending
Efficacy	19.4lm/W @3000K 2.93W	16.6lm/W @3000K 2.93W
CRI	Ra≥90	Ra≥90
Beam Angle	110°	110°
LED MacAdam	2 steps	2 steps
IK Rating	IK10 (With Aluminium Profile)	IK10 (With Aluminium Profile)
Average Life (L70)	> 38,000 hours	> 38,000 hours
Storage Temperature	-40~140°F (-40°C~ 60°C)	
Operating Temperature	-40~113°F (-40°C~ 45°C)	

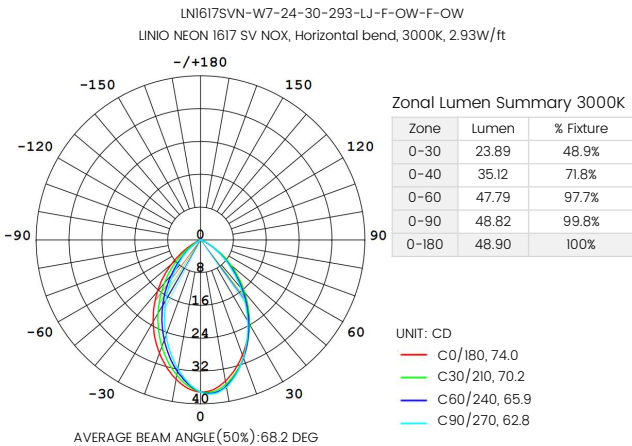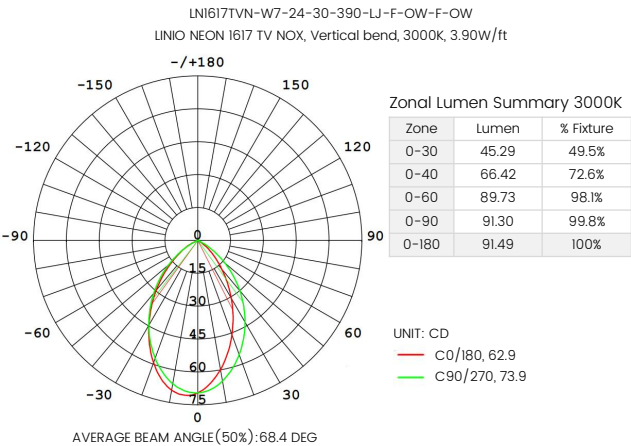Photometry




LINIO NEON 1617 NOX Static White


Outdoor · Vertical Bending · Horizontal Bending

Feed Entry / End Cap Options

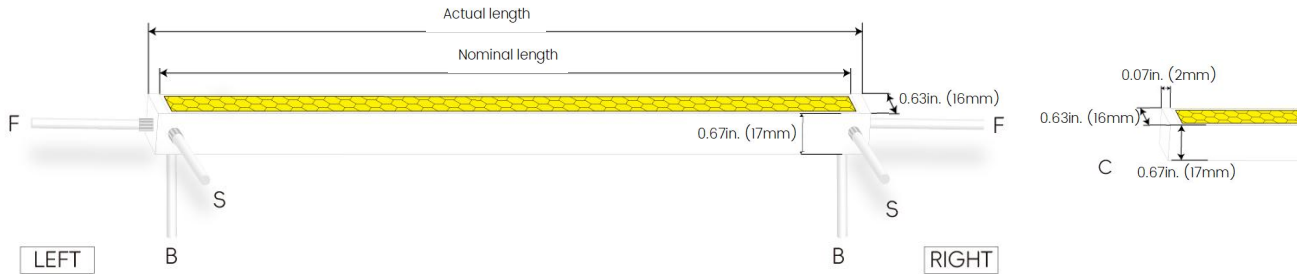
IJ: Injected end cap – IP67, factory-made only



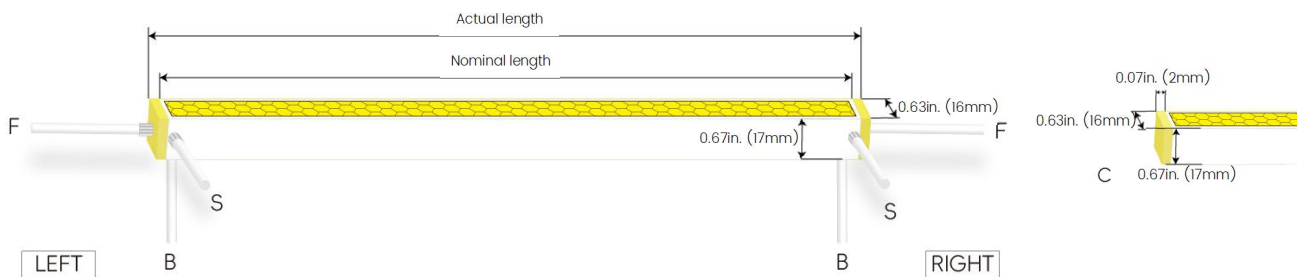
IJC: Clear injected end cap – IP67, factory-made only



SEC: Silicone end cap – IP67

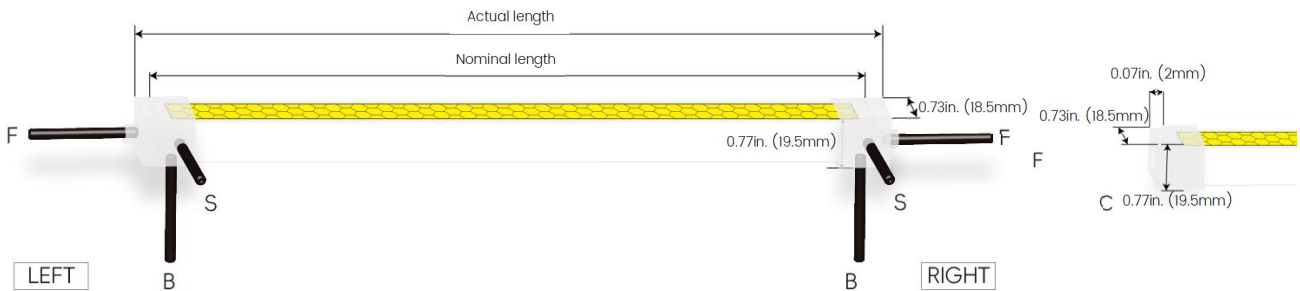

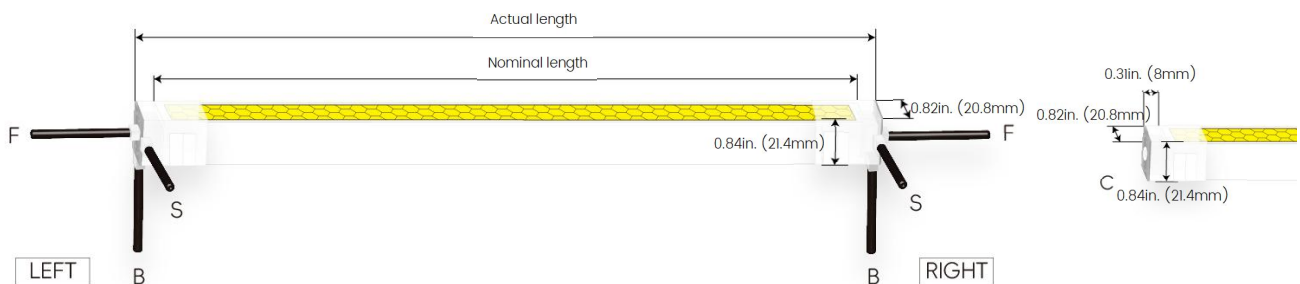MEC: Mechanical end cap with screws – IP67



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 18 AWG (wire length customizable)



MC: Male connector, **Wet**
Standard 0.98ft (30cm), 18 AWG





FC: Female connector, **Wet**
Standard 0.98ft (30cm), 18 AWG


LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending




Mounting Options

**LN1617-SC**



Name	Straight surface channel
Material	Aluminum
Standard Length	3.28ft (1M)

**LN1617-BC**


Name	Bendable surface channel
Material	Aluminum
Standard Length	3.28ft (1M)

**LN1617-RC**



Name	Straight recessed channel
Material	Aluminum
Standard Length	3.28ft (1M)

**LN1617-MC**



Name	Mud-in channel
Material	Aluminum
Standard Length	3.28ft (1M)

**LN1617-BMC**



Name	Bendable mud-in channel
Material	Aluminum
Standard Length	3.28ft (1M)

**LN1617-SCS**



Name	Straight surface channel with silicone groove
Material	Aluminum
Standard Length	3.28ft (1M)

**LN1617-LBC**

Name	Light-block channel
Material	Aluminum
Standard Length	3.28ft (1M)

**LN1617-PC**


Name	PC channel
Material	Polycarbonate
Standard Length	3.28ft (1M)

**LN1617-CL**

Name	Mounting clip
Material	Aluminum
Standard Length	0.98in. (25mm)


LINIO NEON 1617 NOX Static White

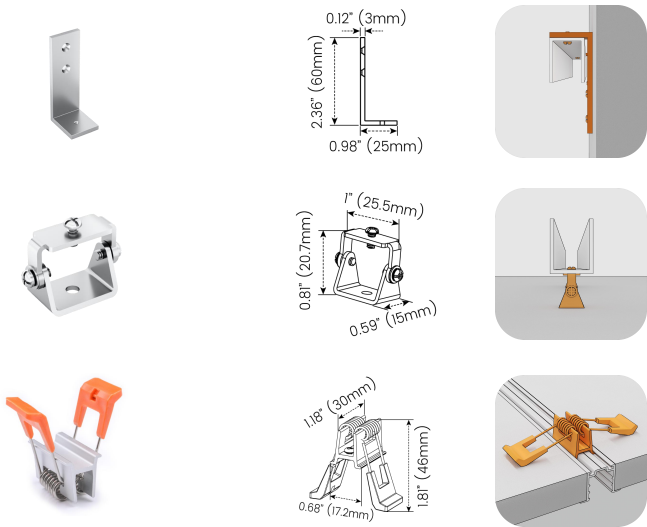Outdoor · Vertical Bending · Horizontal Bending



LN1617-LS	
Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	0.79in. (20mm)
* LN1617-LS can be installed with aluminum channel LN1617-SC.	
LN1617-AC	
Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	1 in. (25.5mm)
* LN1617-LS can be installed with aluminum channel LN1617-SC.	
LN1617-RC-SPC	
Name	Spring clip
Standard Pkg	1pcs
* LN1617-RC-SPC must be installed with aluminum channel LN1617-RC.	

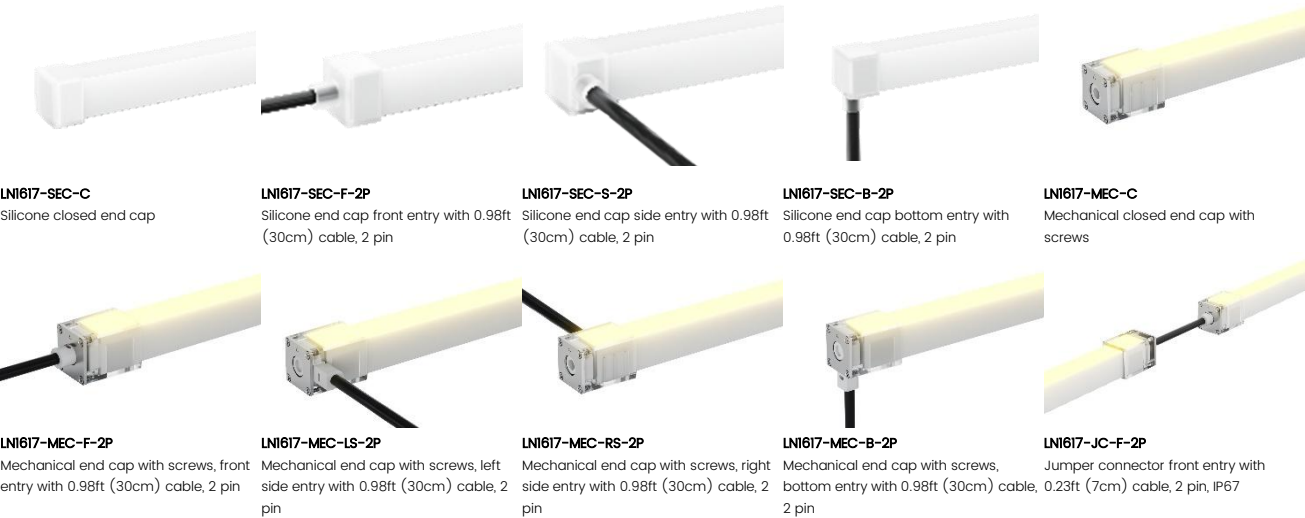End Caps (Optional, purchase for extra)



Additional Accessories (Optional, purchase for extra)



Drivers

LINIO NEON 1617 NOX Static White Outdoor · Vertical Bending· Horizontal Bending

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

Wiring Diagram

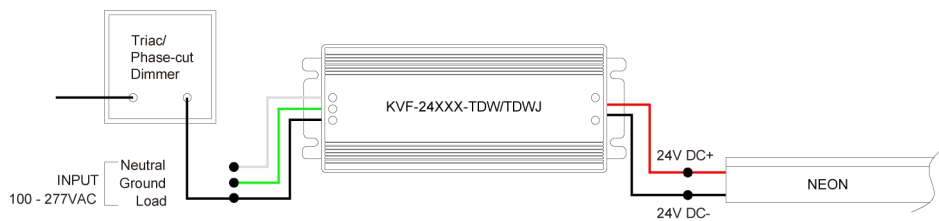
LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending

Non-dimmable



Phase cut/Triac-dimmable



4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



24V Voltage Drop & Maximum Wire Length Chart

LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG
5W / 0.2A	1730 ft (527.3 m)	784 ft (238.9 m)	397 ft (121.0 m)	263 ft (80.2 m)	175 ft (53.3 m)	131 ft (39.9 m)	107 ft (32.6 m)
10W / 0.4A	865 ft (263.6 m)	392 ft (119.4 m)	199 ft (60.7 m)	132 ft (40.2 m)	88 ft (26.8 m)	66 ft (20.1 m)	54 ft (16.5 m)
15W / 0.6A	577 ft (175.9 m)	261 ft (79.6 m)	132 ft (40.2 m)	88 ft (26.8 m)	58 ft (17.7 m)	44 ft (13.4 m)	36 ft (11.0 m)
20W / 0.8A	433 ft (132.0 m)	196 ft (59.7 m)	99 ft (30.2 m)	66 ft (20.1 m)	44 ft (13.4 m)	33 ft (10.1 m)	27 ft (8.2 m)
25W / 1.0A	346 ft (105.5 m)	157 ft (47.9 m)	79 ft (24.1 m)	53 ft (16.2 m)	35 ft (10.7 m)	26 ft (7.9 m)	22 ft (6.7 m)
30W / 1.3A	289 ft (88.1 m)	131 ft (39.9 m)	66 ft (20.1 m)	44 ft (13.4 m)	29 ft (8.8 m)	22 ft (6.7 m)	18 ft (5.5 m)
35W / 1.5A	248 ft (75.6 m)	112 ft (34.1 m)	57 ft (17.4 m)	38 ft (11.6 m)	25 ft (7.6 m)	19 ft (5.8 m)	15 ft (4.6 m)
40W / 1.7A	217 ft (66.1 m)	98 ft (29.9 m)	50 ft (15.2 m)	33 ft (10.1 m)	22 ft (6.7 m)	16 ft (4.9 m)	13 ft (4.0 m)
45W / 1.9A	192 ft (58.5 m)	87 ft (26.5 m)	44 ft (13.4 m)	29 ft (8.8 m)	19 ft (5.8 m)	14 ft (4.3 m)	12 ft (3.7 m)
50W / 2.1A	173 ft (52.7 m)	78 ft (23.8 m)	40 ft (12.2 m)	26 ft (7.9 m)	18 ft (5.5 m)	13 ft (4.0 m)	11 ft (3.4 m)
55W / 2.3A	157 ft (47.9 m)	71 ft (21.6 m)	36 ft (11.0 m)	24 ft (7.3 m)	16 ft (4.9 m)	12 ft (3.7 m)	10 ft (3.0 m)
60W / 2.5A	144 ft (43.9 m)	65 ft (19.8 m)	33 ft (10.1 m)	22 ft (6.7 m)	15 ft (4.6 m)	11 ft (3.4 m)	9 ft (2.7 m)
65W / 2.7A	133 ft (40.5 m)	60 ft (18.3 m)	30 ft (9.1 m)	20 ft (6.1 m)	14 ft (4.3 m)	10 ft (3.0 m)	8 ft (2.4 m)
70W / 2.9A	124 ft (37.8 m)	56 ft (17.1 m)	28 ft (8.5 m)	19 ft (5.8 m)	13 ft (4.0 m)	10 ft (3.0 m)	8 ft (2.4 m)
75W / 3.1A	116 ft (35.4 m)	52 ft (15.9 m)	26 ft (7.9 m)	17 ft (5.2 m)	12 ft (3.7 m)	9 ft (2.7 m)	7 ft (2.1 m)
80W / 3.3A	109 ft (33.2 m)	49 ft (14.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	11 ft (3.4 m)	8 ft (2.4 m)	7 ft (2.1 m)
85W / 3.5A	103 ft (31.4 m)	46 ft (14.0 m)	23 ft (7.0 m)	15 ft (4.6 m)	10 ft (3.0 m)	8 ft (2.4 m)	6 ft (1.8 m)
90W / 3.8A	97 ft (29.6 m)	44 ft (13.4 m)	22 ft (6.7 m)	15 ft (4.6 m)	10 ft (3.0 m)	7 ft (2.1 m)	6 ft (1.8 m)
96W / 4.0A	91 ft (27.7 m)	41 ft (12.5 m)	21 ft (6.4 m)	14 ft (4.3 m)	9 ft (2.7 m)	7 ft (2.1 m)	6 ft (1.8 m)