

LINIO NEON 1228X SV

Outdoor · Horizontal Bending · Static White


Features

- Dome top design, eye-catching direct view from three different angles
- IP67 rated, ideal for outdoor uses
- 5 years warranty




Applications

Museums, malls, amusement parks, restaurants, resorts, etc.

Date	Fixture type
Project name	Project phase



Dimension

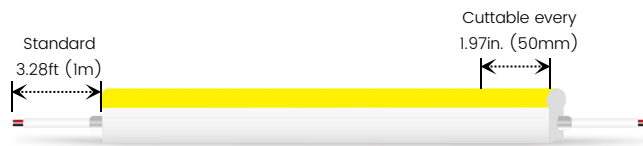

Order Code

Model	Environment	Voltage	Temp./Color	Power	End Cap	Left Feed Entry	
LNI228XSV	W7-Wet (IP67)	24-DC24V	22-2200K 27-2700K 30-3000K 35-3500K 40-4000K 50-5000K	293-2.93W/ft 439-4.39W/ft	IJ Injected (IP67) SEC Silicone (IP67)	F Front B Bottom S Side C Closed	OW Open wire 3.28ft (1m) MC Male connector with 0.98ft (30cm) cable FC Female connector with 0.98ft (30cm) cable NA Only for Closed Feed Entry

*Injected end cap are factory-made only.

Assembly Builder

Right Feed Entry				Length	
F	Front	OW	Open wire 3.28ft (1m)	Max. nominal	65.6ft(20m)
B	Bottom	MC	Male connector with 0.98ft (30cm) cable	*For 2.93W/ft	
S	Side	FC	Female connector with 0.98ft (30cm) cable	Max. nominal	49ft(15m)
C	Closed	NA	Only for Closed Feed Entry	*For 4.39W/ft	

Increment 1.97in.(50mm)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page.

Lumen Output (lm/ft)

Temp./Color	2.93W/ft	4.39W/ft
2200K	103	152
2700K	110	163
3000K	118	175
3500K	114	169
4000K	113	167
5000K	112	166
Max. Run for Class 2	26.2ft (8m)	17.5ft (5.3m)

Technical Details


Efficacy	34lm/W @4000K 2.93W
CRI	Ra≥90
Beam Angle	180°
LED MacAdam	2 steps
Average Life (L70)	> 54,000 hours
Storage Temperature	-40-185°F (-40°C- 85°C)
Operating Temperature	-40-113°F (-40°C- 45°C) @2.93&4.39W/ft

LINIO NEON 1228X SV

Outdoor · Horizontal Bending · Static White

Photometry

LN1228XSV-W7-24-30-293-IJ-F-OW-F-OW
LINIO NEON 1228X SV, Horizontal bend, 3000K, 2.93W/ft

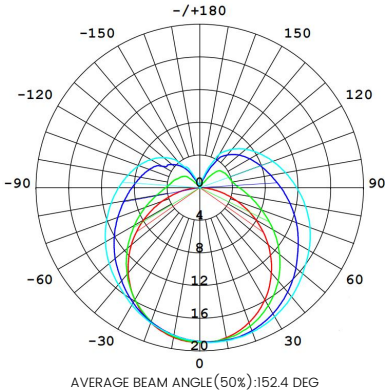


Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	14.94	15.2%
0-40	24.88	25.4%
0-60	46.76	47.7%
0-90	73.49	74.9%
0-180	98.08	100%


UNIT: CD
— C0/180, 109.9
— C30/210, 122.7
— C60/240, 172.9
— C90/270, 204.0

Feed Entry / End Cap Options

IJ: Injected end cap – IP67, factory-made only

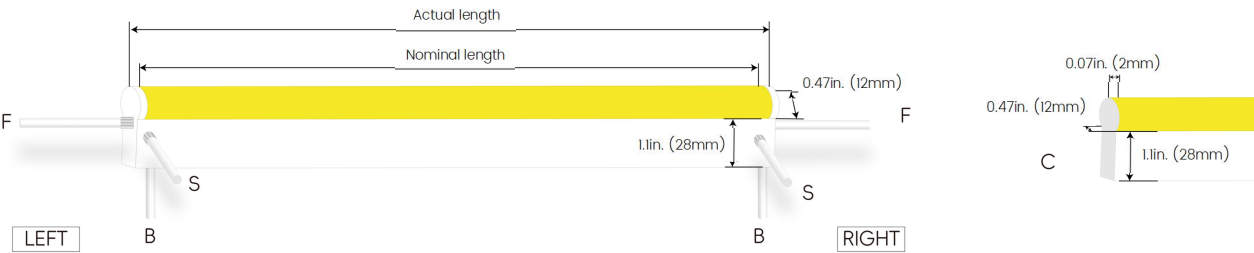

SEC: Silicone end cap – IP67

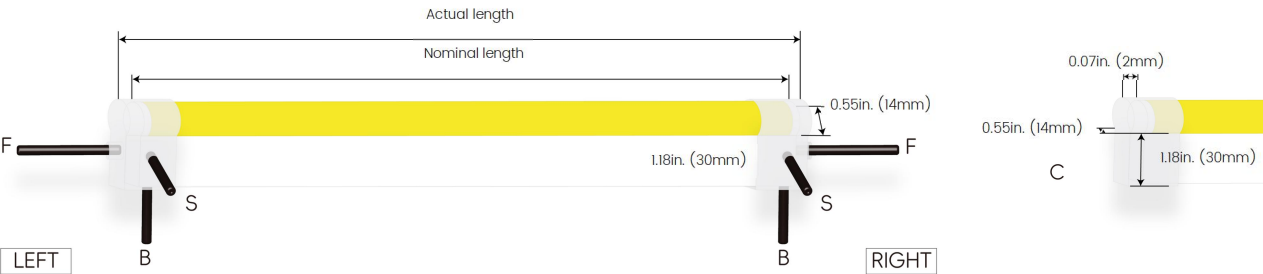

Connector Wire Options



OW: Open wire, **Dry** only
Standard 3.28ft (1m), 20 AWG (wire length made to order)



MC: Male connector, **Wet**
Standard 0.98ft (30cm), 20 AWG





FC: Female connector, **Wet**
Standard 0.98ft (30cm), 20 AWG

LINIO NEON 1228X SV


Outdoor · Horizontal Bending · Static White

Mounting Options






LINI228-SC

Name	Straight surface channel
Material	Aluminum
Standard Length	3.28ft (1M)





LINI228-BC

Name	Bendable surface channel
Material	Aluminum
Standard Length	3.28ft (1M)



LINI228-RC

Name	Straight recessed channel
Material	Aluminum
Standard Length	3.28ft (1M)



LINI228-CL

Name	Mounting clip
Material	Stainless Steel
Standard Length	0.79in. (20mm)

End Caps (Optional, purchase for extra)



LINI228-SEC-C
Silicone closed end cap



LINI228-SEC-F-2P
Silicone end cap front entry with 0.98ft (30cm) cable, 2 pin



LINI228-SEC-S-2P
Silicone end cap side entry with 0.98ft (30cm) cable, 2 pin



LINI228-SEC-B-2P
Silicone end cap bottom entry with 0.98ft (30cm) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 20 AWG



FCW-2P-67
Female connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 20 AWG



MCB-2P-67
Male connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 20 AWG



FCB-2P-67
Female connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 20 AWG

Drivers

LINIO NEON 1228X SV

Outdoor · Horizontal Bending · Static White

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

Wiring Diagram


LINIO NEON 1228X SV

Outdoor · Horizontal Bending · Static White

Non-dimmable



Phase cut/Triac-dimmable

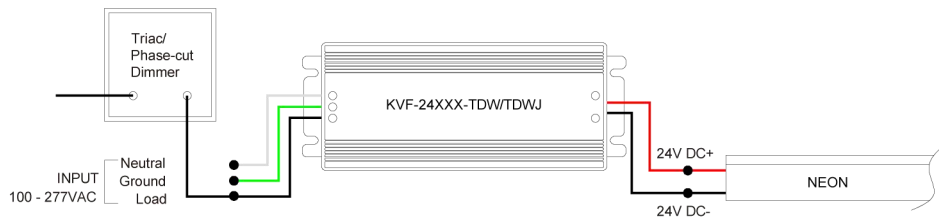

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



LINIO NEON 1228X SV

Outdoor · Horizontal Bending · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG
5W / 0.2A	1730 ft (527.3 m)	784 ft (238.9 m)	397 ft (121.0 m)	263 ft (80.2 m)	175 ft (53.3 m)	131 ft (39.9 m)	107 ft (32.6 m)
10W / 0.4A	865 ft (263.6 m)	392 ft (119.4 m)	199 ft (60.7 m)	132 ft (40.2 m)	88 ft (26.8 m)	66 ft (20.1 m)	54 ft (16.5 m)
15W / 0.6A	577 ft (175.9 m)	261 ft (79.6 m)	132 ft (40.2 m)	88 ft (26.8 m)	58 ft (17.7 m)	44 ft (13.4 m)	36 ft (11.0 m)
20W / 0.8A	433 ft (132.0 m)	196 ft (59.7 m)	99 ft (30.2 m)	66 ft (20.1 m)	44 ft (13.4 m)	33 ft (10.1 m)	27 ft (8.2 m)
25W / 1.0A	346 ft (105.5 m)	157 ft (47.9 m)	79 ft (24.1 m)	53 ft (16.2 m)	35 ft (10.7 m)	26 ft (7.9 m)	22 ft (6.7 m)
30W / 1.3A	289 ft (88.1 m)	131 ft (39.9 m)	66 ft (20.1 m)	44 ft (13.4 m)	29 ft (8.8 m)	22 ft (6.7 m)	18 ft (5.5 m)
35W / 1.5A	248 ft (75.6 m)	112 ft (34.1 m)	57 ft (17.4 m)	38 ft (11.6 m)	25 ft (7.6 m)	19 ft (5.8 m)	15 ft (4.6 m)
40W / 1.7A	217 ft (66.1 m)	98 ft (29.9 m)	50 ft (15.2 m)	33 ft (10.1 m)	22 ft (6.7 m)	16 ft (4.9 m)	13 ft (4.0 m)
45W / 1.9A	192 ft (58.5 m)	87 ft (26.5 m)	44 ft (13.4 m)	29 ft (8.8 m)	19 ft (5.8 m)	14 ft (4.3 m)	12 ft (3.7 m)
50W / 2.1A	173 ft (52.7 m)	78 ft (23.8 m)	40 ft (12.2 m)	26 ft (7.9 m)	18 ft (5.5 m)	13 ft (4.0 m)	11 ft (3.4 m)
55W / 2.3A	157 ft (47.9 m)	71 ft (21.6 m)	36 ft (11.0 m)	24 ft (7.3 m)	16 ft (4.9 m)	12 ft (3.7 m)	10 ft (3.0 m)
60W / 2.5A	144 ft (43.9 m)	65 ft (19.8 m)	33 ft (10.1 m)	22 ft (6.7 m)	15 ft (4.6 m)	11 ft (3.4 m)	9 ft (2.7 m)
65W / 2.7A	133 ft (40.5 m)	60 ft (18.3 m)	30 ft (9.1 m)	20 ft (6.1 m)	14 ft (4.3 m)	10 ft (3.0 m)	8 ft (2.4 m)
70W / 2.9A	124 ft (37.8 m)	56 ft (17.1 m)	28 ft (8.5 m)	19 ft (5.8 m)	13 ft (4.0 m)	10 ft (3.0 m)	8 ft (2.4 m)
75W / 3.1A	116 ft (35.4 m)	52 ft (15.9 m)	26 ft (7.9 m)	17 ft (5.2 m)	12 ft (3.7 m)	9 ft (2.7 m)	7 ft (2.1 m)
80W / 3.3A	109 ft (33.2 m)	49 ft (14.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	11 ft (3.4 m)	8 ft (2.4 m)	7 ft (2.1 m)
85W / 3.5A	103 ft (31.4 m)	46 ft (14.0 m)	23 ft (7.0 m)	15 ft (4.6 m)	10 ft (3.0 m)	8 ft (2.4 m)	6 ft (1.8 m)
90W / 3.8A	97 ft (29.6 m)	44 ft (13.4 m)	22 ft (6.7 m)	15 ft (4.6 m)	10 ft (3.0 m)	7 ft (2.1 m)	6 ft (1.8 m)
96W / 4.0A	91 ft (27.7 m)	41 ft (12.5 m)	21 ft (6.4 m)	14 ft (4.3 m)	9 ft (2.7 m)	7 ft (2.1 m)	6 ft (1.8 m)