

ANNO TAPE PRO RGB

Indoor · RGB

Features

- High-density diode-free CSP tape, with changeable RGB colors
- IP20 rated, ideal for indoor uses
- 5 years warranty

Applications

Under cabinets, coves, theme parks, bedrooms, studios, etc.



RoHS

ONE BIN



24V DC

Date


Fixture type

Project name

Project phase



Dimensions

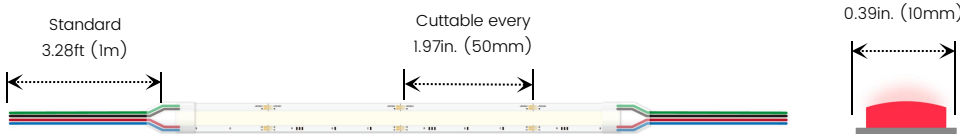

Order Code (For LED tape)

Series	Environment	Voltage	Temp./Color	Power
ANNO P	D2-Dry (IP20)	24-DC24V	RGB-RGB	457-4.57W/ft

Assembly Builder

Left Feed Entry			
F	Front	OW	Open wire 3.28ft (1m), 22 AWG
C	Closed	MC	Male connector with 0.98ft (30cm) cable, 22 AWG
		FC	Female connector with 0.98ft (30cm) cable, 22 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			Illuminated Length ¹
F	Front	OW	Open wire 3.28ft (1m), 22 AWG
C	Closed	MC	Male connector with 0.98ft (30cm) cable, 22 AWG
		FC	Female connector with 0.98ft (30cm) cable, 22 AWG
		NA	Only for Closed Feed Entry

Channel Order Code

Product Code ¹	Colors	Lens	Lengths
Please select on the Channel Compatibility page	S = Silver anodized W = White lacquered B = Black anodized	OP - Opal FR - Frosted CL - Clear	3.28ft (1m) 6.56ft (2m)

1. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap).

1. Including 3.28ft/6.56ft lens cover + 2pcs end caps + 3pcs mounting clips.

Lumen Output (lm/ft)

Temp./Color	4.57W/ft
R	43
G	123
B	25
RGB	180
Max. Run for Class 2*	16.4ft (5m)
Max. Run Supported Length	16.4ft (5m)

*Typically installations in USA and Canada comply with Class 2 requirements.


Technical Details

Width	0.39in. (10mm)
LED Quantity	256 LEDs/ft (840 LEDs/M)
Beam Angle	120°
Efficacy	39.4lm/W @RGB 4.57W
LED MacAdam	3 steps
Average Life (L70)	> 30,000 hours
Max. Length Per Reel	98.4ft (30M)
Storage Temperature	-13-140°F (-25°C-60°C)
Ambient Temperature	-4-113°F (-20°C-45°C)

Feed Entry Options



Connector Wire Options

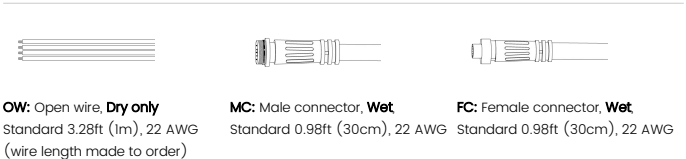

ANNO TAPE PRO RGB

Indoor · RGB

Channel Compatibility

Lens Type & Light Transmission

* Non-standard option, please contact us for customization support.

CL Clear

FR Frosted

OP Opal

Surface			
BE1201 CL 61% FR 55% OP 45%	BE1202 CL 62% FR 56% OP 46%	BE1302 CL 83% FR 76% OP 62%	BE1415 CL 55% FR 50% OP 41%
BE1919 CL 75% FR 68% OP 56%	BE2020 CL 77% FR 70% OP 58%	BE2601 CL 82% FR 75% OP 61%	
Mud-In			
BE5615 CL 58% FR 53% OP 43%	BE7615 CL 71% FR 65% OP 53%		
Recessed			
BE1207 CL 60% FR 55% OP 45%	BE2015 CL 55% FR 51% OP 41%	BE5035 CL 52% FR 48% OP 39%	BE6575 CL 64% FR 58% OP 48%

ANNO TAPE PRO RGB

Indoor · RGB

Corner

BE1001	BE1002	BE1101
CL 86% FR 79% OP 65%	CL 87% FR 79% OP 65%	CL 56% FR 51% OP 42%

Suspended

BE5075	BE60	BE3535
CL 64% FR 58% OP 48%	CL 90% FR 82% OP 67%	CL 54% FR 49% OP 40%

Specialty

BE1806 Bendable surface mounted	BE2009 Coves	BE4615 Borderless Inside Corner	BE5315 Borderless Outside Corner
CL 89% FR 82% OP 67%	CL 55% FR 50% OP 41%	CL 58% FR 53% OP 43%	CL 57% FR 52% OP 43%
BE6728 Staircase	BE7030 Cove Recessed Borderless	BE8833 Cove Recessed / Double-Layer Borderless	
CL 53% FR 49% OP 40%	OP 62%	CL 58% FR 53% OP 43%	

ANNO TAPE PRO RGB Indoor · RGB

Connectors & Additional Accessories (Optional, purchase for extra)



NCO-STCN-4P-10
Strip to cable connector without wire, for 0.39in. (10mm) tape, 4 pin



NCO-STC-4P-10
Strip to cable connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 4 pin



NCO-STSJ-4P-10
Strip to strip jumper connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 4 pin



NCO-STMKB-4P-10
Strip to cable with black male & female connector, for 0.39in. (10mm) tape, 4 pin



NCO-STMKW-4P-10
Strip to cable with white male & female connector, for 0.39in. (10mm) tape, 4 pin



MCW-4P-67
Male connector with 0.98ft (30cm) white cable, 4 pin, IP67, Wet, 20 AWG



FCW-4P-67
Female connector with 0.98ft (30cm) white cable, 4 pin, IP67, Wet, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

ANNO TAPE PRO RGB

Indoor · RGB

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

DMX-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVX-24100-3C-A	100W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.05 x 3.07 x 0.98in. (230 x 78x 25cm)
KVX-24150-3C-A	150W						10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24200-3C-A	200W			No			10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24300-3C-A	300W						11.85 x 3.07 x 0.98in. (301 x 78x 25cm)

DMX Decoders

Code	Description
LT-903	3 channels output, up to 576W output power
LT-912	12 channels output, up to 1152W output power
LT-924	24 channels output, up to 1728W output power

Controllers

Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-GA2	DMX 512 channels, ready to use (pre-loaded with 8 scenes and 170 RGB fixtures)
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram

Non-dimmable



DMX-dimmable



ANNO TAPE PRO RGB Indoor · RGB

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total Load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5W / 0.2A	1730 ft(527.3 m)	1090 ft(332.2 m)	680 ft (207.3 m)	430 ft (131.1 m)	270 ft (82.3 m)	170 ft (51.8 m)	107 ft (32.6 m)	68 ft (20.7 m)
10W / 0.4A	784 ft (239.0 m)	539 ft (164.3 m)	345 ft (105.2 m)	215 ft (65.5 m)	134 ft (40.8 m)	85 ft (25.9 m)	52 ft (15.8 m)	34 ft (10.4 m)
15W / 0.6A	576 ft (175.6 m)	363 ft (110.6 m)	228 ft (69.5 m)	144 ft (43.9 m)	91 ft (27.7 m)	57 ft (17.4 m)	36 ft (11.0 m)	23 ft (7.0 m)
20W / 0.8A	397 ft (121.0 m)	272 ft (82.9 m)	174 ft (53.0 m)	109 ft (33.2 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)
25W / 1.0A	346 ft (105.5 m)	218 ft (66.4 m)	137 ft (41.8 m)	86 ft (26.2 m)	55 ft (16.8 m)	34 ft (10.4 m)	22 ft (6.7 m)	14 ft (4.3 m)
30W / 1.2A	263 ft (80.2 m)	181 ft (55.2 m)	115 ft (35.1 m)	72 ft (21.9 m)	45 ft (13.7 m)	27 ft (8.2 m)	17 ft (5.2 m)	12 ft (3.7 m)
35W / 1.5A	247 ft (75.3 m)	156 ft (47.5 m)	98 ft (29.9 m)	62 ft (18.9 m)	39 ft (11.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	10 ft (3.0 m)
40W / 1.7A	197 ft (60.0 m)	135 ft (41.1 m)	86 ft (26.2 m)	54 ft (16.5 m)	33 ft (10.1 m)	21 ft (6.4 m)	13 ft (4.0 m)	9 ft (2.7 m)
45W / 1.9A	192 ft (58.5 m)	121 ft (36.9 m)	76 ft (23.2 m)	48 ft (14.6 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	8 ft (2.4 m)
50W / 2.1A	158 ft (48.2 m)	108 ft (32.9 m)	69 ft (21.0 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	10.5 ft (3.2 m)	7 ft (2.1 m)
60W / 2.5A	131 ft (39.9 m)	90 ft (27.4 m)	57 ft (17.4 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	9 ft (2.7 m)	6 ft (1.8 m)
70W / 2.9A	112 ft (34.1 m)	77 ft (23.5 m)	49 ft (14.9 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	7.5 ft (2.3 m)	5 ft (1.5 m)
80W / 3.3A	98 ft (29.9 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	11 ft (3.4 m)	6.8 ft (2.1 m)	5 ft (1.5 m)
90W / 3.8A	97 ft (29.6 m)	61 ft (18.6 m)	39 ft (11.9 m)	24 ft (7.3 m)	15 ft (4.6 m)	9 ft (2.7 m)	6 ft (1.8 m)	4 ft (1.2 m)
100W / 4.2A	82 ft (25.0 m)	56 ft (17.1 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	8 ft (2.4 m)	5.3 ft (1.6 m)	4 ft (1.2 m)