

ANNO TAPE COLORS

Indoor · COLORS

Features

- High-density diode-free COB tape, with various monochromatic color options
- IP20 rated, ideal for indoor uses
- 5 years warranty

Applications

Under cabinets, coves, theme parks, bedrooms, studios, etc.




RoHS

ONE BIN

DIM

24V DC

Dimensions

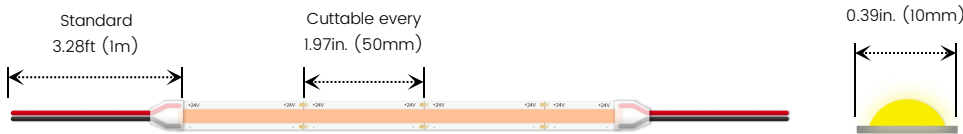

Order Code (For LED tape)

Series	Environment	Voltage	Temp./Color	Power
ANNO	D2-Dry (IP20)	24-DC24V	R-Red G-Green B-Blue A-Amber P-Purple Y-Yellow PK-Pink	305~3.05W/ft

Assembly Builder

Left Feed Entry			
F	Front	OW	Open wire 3.28ft (1m), 20 AWG
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG
		FC	Female connector with 0.66ft (20cm) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			Illuminated Length ¹	
F	Front	OW	Open wire 3.28ft (1m), 20 AWG	Max 16.4ft (5m)
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG	Increment 1.97in. (50mm)
		FC	Female connector with 0.66ft (20cm) cable, 20 AWG	
		NA	Only for Closed Feed Entry	

Channel Order Code

Product Code ¹	Colors	Lens	Lengths
Please select on the Channel Compatibility page	S = Silver anodized W = White lacquered B = Black anodized	OP - Opal FR - Frosted CL - Clear	3.28ft (1m) 6.56ft (2m)

1. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap).

1. Including 3.28ft/6.56ft lens cover + 2pcs end caps+2pcs mounting clips.

Lumen Output (lm/ft)

Temp./Color	3.05W/ft
Red	55
Green	345
Blue	66
Amber	77
Purple	171
Yellow	151
Pink	210
Max. Run for Class 2*	16.4ft (5m)
Max. Run Supported Length	32.8ft (10m)

*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details

Width	0.39in. (10mm)
LED Quantity	146 LEDs/ft (480 LEDs/M)
Beam Angle	180°
Efficacy	18lm/W @Red 3.05W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	98.4ft (30m)
Storage Temperature	-4-113°F (-20°C~ 60°C)
Ambient Temperature	-13-140°F (-20°C~ 45°C)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG
(wire length made to order)



MC: Male connector, **Dry & Damp**. FC: Female connector, **Dry & Damp**
Standard 0.66ft (20cm), 20 AWG
Standard 0.66ft (20cm), 20 AWG



ANNO TAPE COLORS

Indoor · COLORS

Channel Compatibility

Lens Type & Light Transmission

* Non-standard option, please contact us for customization support.

CL Clear

FR Frosted

OP Opal

Surface			
BEI201 CL 50% FR 46% OP 38%	BEI202 CL 51% FR 47% OP 38%	BEI302 CL 70% FR 64% OP 53%	BEI415 CL 44% FR 40% OP 33%
BEI919 CL 65% FR 60% OP 49%	BE2020 CL 64% FR 58% OP 48%	BE2601 CL 73% FR 67% OP 55%	
Mud-In			
BE5615 CL 49% FR 45% OP 37%	BE7615 CL 60% FR 55% OP 45%		
Recessed			
BEI207 CL 50% FR 46% OP 37%	BE2015 CL 45% FR 41% OP 34%	BE5035 CL 54% FR 49% OP 40%	BE6575 CL 55% FR 50% OP 41%

ANNO TAPE COLORS

Indoor · COLORS

Corner

BE1001	BE1002	BE1101
CL 77% FR 70% OP 57%	CL 76% FR 69% OP 57%	CL 49% FR 44% OP 36%

Suspended

BE5075	BE60	BE3535
CL 55% FR 50% OP 41%	CL 80% FR 73% OP 60%	CL 46% FR 42% OP 35%

Specialty

BE1806 Bendable surface mounted	BE2009 Coves	BE4615 Borderless Inside Corner	BE5315 Borderless Outside Corner
CL 77% FR 70% OP 57%	CL 49% FR 45% OP 36%	CL 51% FR 46% OP 38%	CL 49% FR 45% OP 31%
BE6728 Staircase	BE8833 Cove Recessed / Double-Layer Borderless		
CL 45% FR 41% OP 34%	CL 52% FR 48% OP 39%		

ANNO TAPE COLORS

Indoor · COLORS

Connectors & Additional Accessories (Optional, purchase for extra)



NI4CO-STCN-2P-10
Strip to cable connector without wire, for 0.39in. (10mm) tape, 2 pin



NI4CO-STC-2P-10
Strip to cable connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin



NI4CO-STSJ-2P-10
Strip to strip jumper connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin



NI4CO-STDCB-2P-10
Strip to cable with black male & female connector, for 0.39in. (10mm) tape, 2 pin



NI4CO-STDCW-2P-10
Strip to cable with white male & female connector, for 0.39in. (10mm) tape, 2 pin



NI4CO-STSS-2P-10
Strip to strip connector, for 0.39in. (10mm) tape, 2 pin



CI4CO-LC-2P-10
L-shaped corner connector, for 0.39in. (10mm) tape, 2 pin



CI4CO-RC-2P-10
R-shaped corner connector, for 0.39in. (10mm) tape, 2 pin



NI6CO-L-2P-10
L-shaped connector, for 0.39in. (10mm) tape, 2 pin



MCB-DC-44
Male DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG



FCB-DC-44
Female DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

ANNO TAPE COLORS

Indoor · COLORS

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

ANNO TAPE COLORS


Indoor · COLORS

Wiring Diagram


Non-dimmable




Phase cut/Triac-dimmable

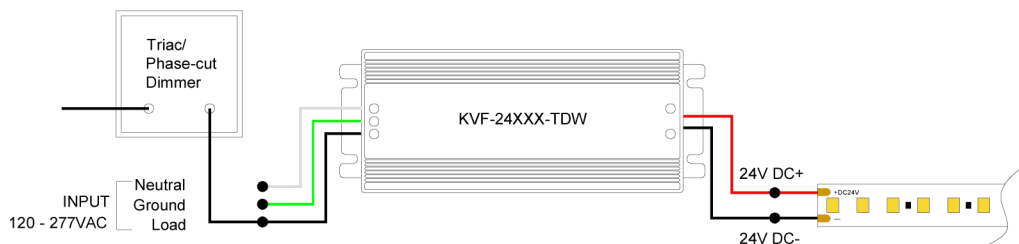

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

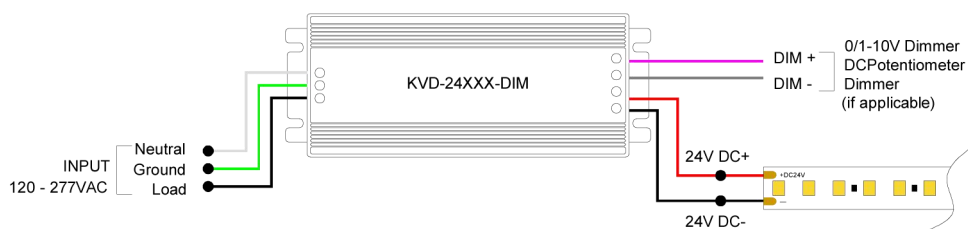

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

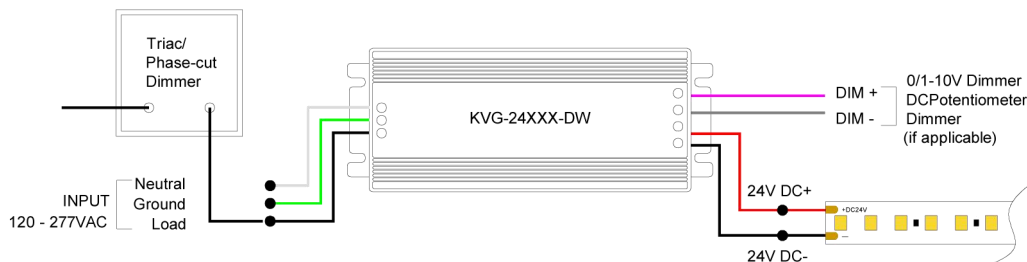

ANNO TAPE COLORS

Indoor · COLORS

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total Load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5W / 0.2A	1730 ft(527.3 m)	1090 ft(332.2 m)	680 ft (207.3 m)	430 ft (131.1 m)	270 ft (82.3 m)	170 ft (51.8 m)	107 ft (32.6 m)	68 ft (20.7 m)
10W / 0.4A	784 ft (239.0 m)	539 ft (164.3 m)	345 ft (105.2 m)	215 ft (65.5 m)	134 ft (40.8 m)	85 ft (25.9 m)	52 ft (15.8 m)	34 ft (10.4 m)
15W / 0.6A	576 ft (175.6 m)	363 ft (110.6 m)	228 ft (69.5 m)	144 ft (43.9 m)	91 ft (27.7 m)	57 ft (17.4 m)	36 ft (11.0 m)	23 ft (7.0 m)
20W / 0.8A	397 ft (121.0 m)	272 ft (82.9 m)	174 ft (53.0 m)	109 ft (33.2 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)
25W / 1.0A	346 ft (105.5 m)	218 ft (66.4 m)	137 ft (41.8 m)	86 ft (26.2 m)	55 ft (16.8 m)	34 ft (10.4 m)	22 ft (6.7 m)	14 ft (4.3 m)
30W / 1.2A	263 ft (80.2 m)	181 ft (55.2 m)	115 ft (35.1 m)	72 ft (21.9 m)	45 ft (13.7 m)	27 ft (8.2 m)	17 ft (5.2 m)	12 ft (3.7 m)
35W / 1.5A	247 ft (75.3 m)	156 ft (47.5 m)	98 ft (29.9 m)	62 ft (18.9 m)	39 ft (11.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	10 ft (3.0 m)
40W / 1.7A	197 ft (60.0 m)	135 ft (41.1 m)	86 ft (26.2 m)	54 ft (16.5 m)	33 ft (10.1 m)	21 ft (6.4 m)	13 ft (4.0 m)	9 ft (2.7 m)
45W / 1.9A	192 ft (58.5 m)	121 ft (36.9 m)	76 ft (23.2 m)	48 ft (14.6 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	8 ft (2.4 m)
50W / 2.1A	158 ft (48.2 m)	108 ft (32.9 m)	69 ft (21.0 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	10.5 ft (3.2 m)	7 ft (2.1 m)
60W / 2.5A	131 ft (39.9 m)	90 ft (27.4 m)	57 ft (17.4 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	9 ft (2.7 m)	6 ft (1.8 m)
70W / 2.9A	112 ft (34.1 m)	77 ft (23.5 m)	49 ft (14.9 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	7.5 ft (2.3 m)	5 ft (1.5 m)
80W / 3.3A	98 ft (29.9 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	11 ft (3.4 m)	6.8 ft (2.1 m)	5 ft (1.5 m)
90W / 3.8A	97 ft (29.6 m)	61 ft (18.6 m)	39 ft (11.9 m)	24 ft (7.3 m)	15 ft (4.6 m)	9 ft (2.7 m)	6 ft (1.8 m)	4 ft (1.2 m)
100W / 4.2A	82 ft (25.0 m)	56 ft (17.1 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	8 ft (2.4 m)	5.3 ft (1.6 m)	4 ft (1.2 m)