

ORLUX SMALL

Outdoor · Vertical Bending · Horizontal Bending

Features

- Field-cut everywhere for an exact fit; continuous illumination with no dark gaps.
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty

Applications

Under cabinets, niches, shelves, closets, millwork, furnitures, etc.



Date



Fixture type

Project name

Project phase




Dimensions (Vertical Bending · Horizontal Bending)

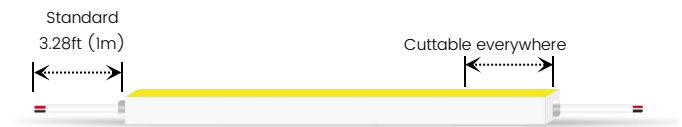


Bending Directions & Diameters

TV - Top View (Vertical Bending)



*Horizontal bending and 3D bending are prohibited.

SV - Side View (Horizontal Bending)



*Vertical bending and 3D bending are prohibited.

Order Code

Series	Environment	Voltage	Temp./Color	Power	End Cap	Left Feed Entry
OTVS	W5-Wet (IP65)	24-DC24V	27-2700K	183-1.83W/ft	IJ Injected (IP65)	F Front
OSVS			30-3000K		IJC Clear injected (IP65)	B Bottom
			35-3500K		SEC Silicone (IP65)	S Side
			40-4000K			C Closed
			57-5700K			OW Open wire 3.28ft (1m)
						MC Male connector with 0.98ft (30cm) cable
						FC Female connector with 0.98ft (30cm) cable
						NA Only for Closed Feed Entry

*Injected and clear injected end cap are factory-made only.

Assembly Builder

Right Feed Entry	Length
F Front	OW Open wire 3.28ft (1m)
B Bottom	MC Male connector with 0.98ft (30cm) cable
S Side	FC Female connector with 0.98ft (30cm) cable
C Closed	NA Only for Closed Feed Entry

*We will manufacture to the requested length considering the increment length.

Mounting Order Code

Product Code

Please select on the Mounting Options page.



ORLUX SMALL

Outdoor · Vertical Bending · Horizontal Bending

Lumen Output (lm/ft)		
Temp./Color	Vertical Bending	Horizontal Bending
	1.83W/ft	1.83W/ft
2700K	102	89
3000K	108	90
3500K	110	92
4000K	113	95
5700K	115	99
Max. Run for Class 2*		16.4ft (5m)

Technical Details		
	Vertical Bending	Horizontal Bending
Efficacy	61.7lm/W @4000K	51.9lm/W @4000K
CRI	Ra≥90	Ra≥90
Beam Angle	110°	110°
Average Life (L70)	> 47,000 hours	> 47,000 hours
Storage Temperature	-40-140°F (-40°C~ 60°C)	
Operating Temperature	-40-113°F (-40°C~ 45°C)	

Photometry

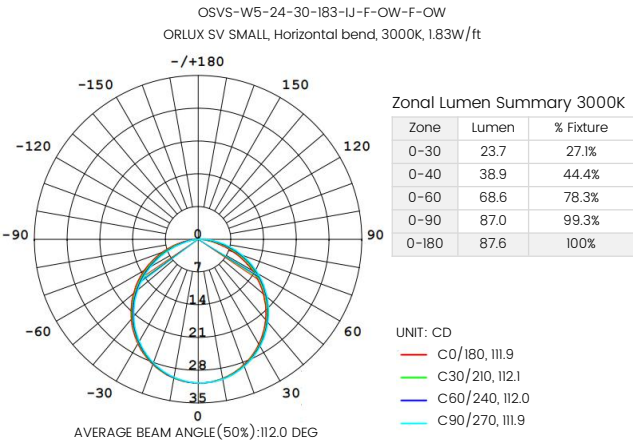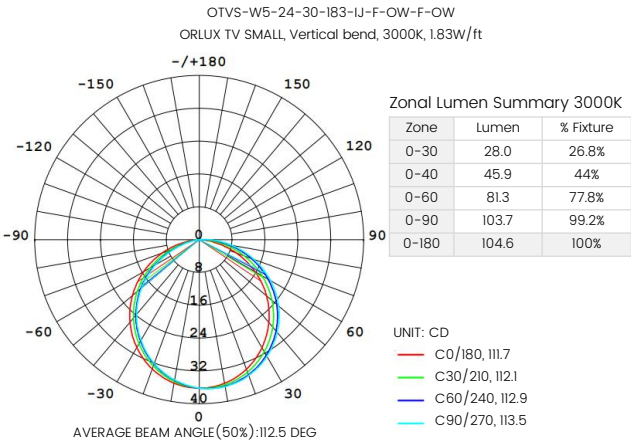


ORLUX SMALL

Outdoor · Vertical Bending · Horizontal Bending

Feed Entry / End Cap Options


IJ: Injected end cap – IP65, factory-made only

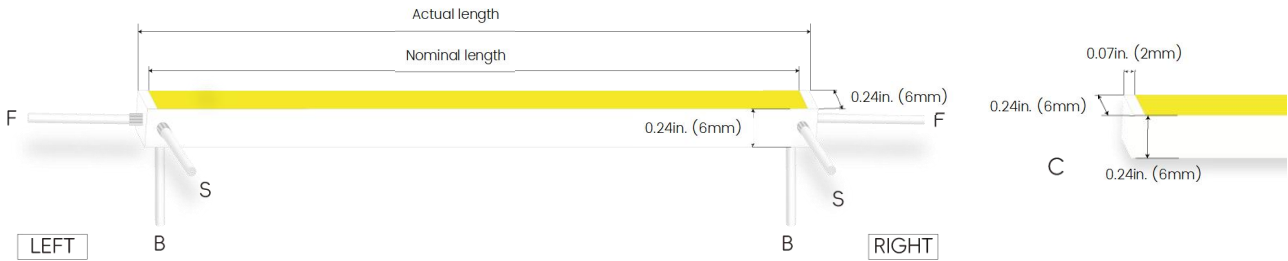

IJC: Clear injected end cap – IP65, factory-made only



SEC: Silicone end cap – IP65

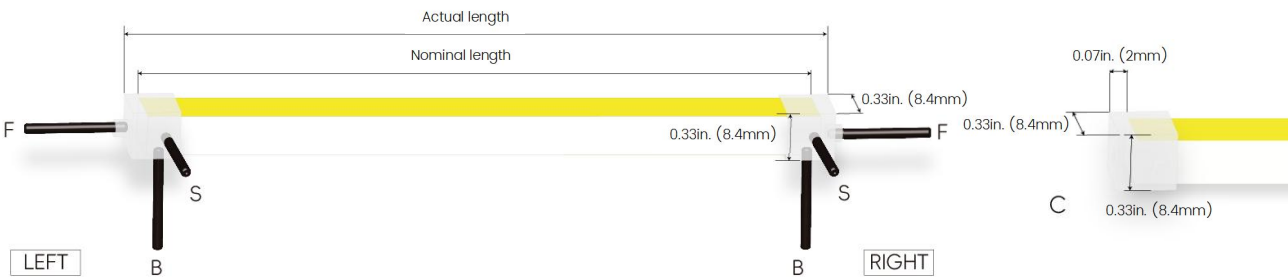

Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 24 AWG (wire length customizable)



MC: Male connector, 2pin, 24AWG, IP20, 0.66ft(20cm)

FC: Female connector, 2pin, 24AWG, IP20, 0.66ft(20cm)



ORLUX SMALL

Outdoor · Vertical Bending · Horizontal Bending

Mounting Options



ORLUX-S-SC	
Name	Straight surface channel
Material	Aluminum
Standard Length	3.28ft (1M)



ORLUX-S-CL	
Name	Mounting clip
Material	Aluminum
Standard Length	0.98in. (25mm)

End Caps (Optional, purchase for extra)



ORLUX-S-SEC-C
Silicone closed end cap



ORLUX-S-SEC-F-2P
Silicone end cap front entry with 0.98ft (30cm) cable, 2 pin



ORLUX-S-SEC-S-2P
Silicone end cap side entry with 0.98ft (30cm) cable, 2 pin



ORLUX-S-SEC-B-2P
Silicone end cap bottom entry with 0.98ft (30cm) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MC-2P-20
Male connector with 0.66ft (20cm) 2pin, IP20, 24AWG



FC-2P-20
Female connector with 0.66ft (20cm) 2pin, IP20, 24AWG

ORLUX SMALL

Outdoor · Vertical Bending · Horizontal Bending

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

ORLUX SMALL

Outdoor · Vertical Bending · Horizontal Bending

Wiring Diagram


Non-dimmable



Phase cut/Triac-dimmable



4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

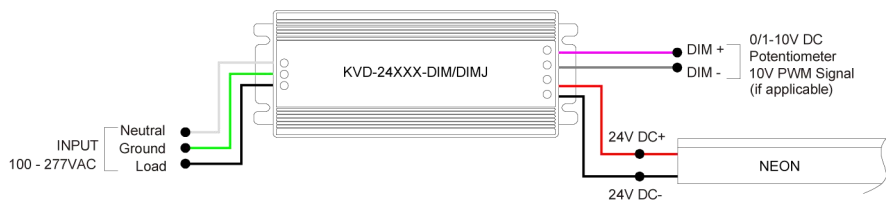

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



ORLUX SMALL

Outdoor · Vertical Bending · Horizontal Bending

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG
5W / 0.2A	1730 ft (527.3 m)	784 ft (238.9 m)	397 ft (121.0 m)	263 ft (80.2 m)	175 ft (53.3 m)	131 ft (39.9 m)	107 ft (32.6 m)
10W / 0.4A	865 ft (263.6 m)	392 ft (119.4 m)	199 ft (60.7 m)	132 ft (40.2 m)	88 ft (26.8 m)	66 ft (20.1 m)	54 ft (16.5 m)
15W / 0.6A	577 ft (175.9 m)	261 ft (79.6 m)	132 ft (40.2 m)	88 ft (26.8 m)	58 ft (17.7 m)	44 ft (13.4 m)	36 ft (11.0 m)
20W / 0.8A	433 ft (132.0 m)	196 ft (59.7 m)	99 ft (30.2 m)	66 ft (20.1 m)	44 ft (13.4 m)	33 ft (10.1 m)	27 ft (8.2 m)
25W / 1.0A	346 ft (105.5 m)	157 ft (47.9 m)	79 ft (24.1 m)	53 ft (16.2 m)	35 ft (10.7 m)	26 ft (7.9 m)	22 ft (6.7 m)
30W / 1.3A	289 ft (88.1 m)	131 ft (39.9 m)	66 ft (20.1 m)	44 ft (13.4 m)	29 ft (8.8 m)	22 ft (6.7 m)	18 ft (5.5 m)
35W / 1.5A	248 ft (75.6 m)	112 ft (34.1 m)	57 ft (17.4 m)	38 ft (11.6 m)	25 ft (7.6 m)	19 ft (5.8 m)	15 ft (4.6 m)
40W / 1.7A	217 ft (66.1 m)	98 ft (29.9 m)	50 ft (15.2 m)	33 ft (10.1 m)	22 ft (6.7 m)	16 ft (4.9 m)	13 ft (4.0 m)
45W / 1.9A	192 ft (58.5 m)	87 ft (26.5 m)	44 ft (13.4 m)	29 ft (8.8 m)	19 ft (5.8 m)	14 ft (4.3 m)	12 ft (3.7 m)
50W / 2.1A	173 ft (52.7 m)	78 ft (23.8 m)	40 ft (12.2 m)	26 ft (7.9 m)	18 ft (5.5 m)	13 ft (4.0 m)	11 ft (3.4 m)
55W / 2.3A	157 ft (47.9 m)	71 ft (21.6 m)	36 ft (11.0 m)	24 ft (7.3 m)	16 ft (4.9 m)	12 ft (3.7 m)	10 ft (3.0 m)
60W / 2.5A	144 ft (43.9 m)	65 ft (19.8 m)	33 ft (10.1 m)	22 ft (6.7 m)	15 ft (4.6 m)	11 ft (3.4 m)	9 ft (2.7 m)
65W / 2.7A	133 ft (40.5 m)	60 ft (18.3 m)	30 ft (9.1 m)	20 ft (6.1 m)	14 ft (4.3 m)	10 ft (3.0 m)	8 ft (2.4 m)
70W / 2.9A	124 ft (37.8 m)	56 ft (17.1 m)	28 ft (8.5 m)	19 ft (5.8 m)	13 ft (4.0 m)	10 ft (3.0 m)	8 ft (2.4 m)
75W / 3.1A	116 ft (35.4 m)	52 ft (15.9 m)	26 ft (7.9 m)	17 ft (5.2 m)	12 ft (3.7 m)	9 ft (2.7 m)	7 ft (2.1 m)
80W / 3.3A	109 ft (33.2 m)	49 ft (14.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	11 ft (3.4 m)	8 ft (2.4 m)	7 ft (2.1 m)
85W / 3.5A	103 ft (31.4 m)	46 ft (14.0 m)	23 ft (7.0 m)	15 ft (4.6 m)	10 ft (3.0 m)	8 ft (2.4 m)	6 ft (1.8 m)
90W / 3.8A	97 ft (29.6 m)	44 ft (13.4 m)	22 ft (6.7 m)	15 ft (4.6 m)	10 ft (3.0 m)	7 ft (2.1 m)	6 ft (1.8 m)
96W / 4.0A	91 ft (27.7 m)	41 ft (12.5 m)	21 ft (6.4 m)	14 ft (4.3 m)	9 ft (2.7 m)	7 ft (2.1 m)	6 ft (1.8 m)