

Hand in hand
Build up success





CONTENTS

WHY BEAMEVER	08	LED TAPE	38
BASIC CUSTOMIZABLE PARAMETERS	09	Beamever Tape Series Navigation Map	40
PRODUCT CLASSIFICATION	10		
FLEXIBLE NEON	12	CHANNEL PROFILES	44
Beamever Neon Series Navigation Map	14	Universal Navigation Map	44
		Architectural Navigation Map	46
		Special Channel Profiles Navigation Map	48
		Tape-Channel Compatibility Chart	50
LINIO NEON 1617 TV HOT	18		
LINIO NEON 1617 TV TW	19		
LINIO NEON 1617 TV RGB	20		
LINIO NEON 1617 TV RGBW	21		
LINIO NEON 1617 TV PIXEL RGBW	22		
LINIO NEON 1617 SV HOT	23		
LINIO NEON 1617 SV TW	24		
LINIO NEON 1617 SV RGB	25		
LINIO NEON 1617 SV RGBW	26		
LINIO NEON 1617 SV PIXEL RGBW	27		
LINIO NEON 1010X TV	28		
LINIO NEON 1010X TV TW	29		
LINIO NEON 1010X SV	30		
LINIO NEON 0612X SV	31		
LINIO NEON 0612X SV TW	32		
LINIO NEON 0606X TV	33		
LINIO NEON 0408X SV	34		
RIGID FIXTURES	36		
FIT EOS SURFACE HOT	37		

DESIGNER'S CUSTOM PLAYGROUND

- Professional engineering team
 - Sufficient raw material stock
 - Abundant production equipment
- Our customization realizes your inspiration

10+ years of industry experience;
1,000+ days of R&D;
10,000+ hours of verifying and testing;
These are what bring Beamever to life.

As the "Designer's Custom Playground", with our own original factory, we are able to provide highly efficient and flexible customization that seamlessly meets the diverse application needs.

With cutting-edge industry technologies and production lines, our innovative products have never stopped to amaze specifiers and lighting designers in the industry. Working with Beamever, there are no limits to your imagination!



WHY BEAMEVER



EFFICIENT CUSTOMIZATION

Our professional team, ample raw materials, and advanced equipment allow flexible customization of CCT, color, wattage, CRI, feed length, and more, without extending lead times.



STRICT QUALITY CONTROL

Our products undergo rigorous testing—salt spray, temperature & humidity, optical, waterproof, and UV-resistant—to prevent yellowing and color differences over time.



VERSATILE TAPES WITH WIDE CCT OPTIONS

Our compact tape lights come in a wide range of color temperatures (1800K to 6500K), including color-changing options. They offer bright, energy-efficient illumination comparable to traditional fluorescents, with easy installation and a perfect fit for any space.



EVEN ILLUMINATION

Featuring high-brightness SMD LEDs, our tape lights offer pure color, even illumination, and no glare, suitable for both lighting and decoration.

BASIC CUSTOMIZABLE PARAMETERS

PHYSICAL PARAMETERS

01 Color & CCT

CCT (Color temperature) can be adjusted from 1800K to 6500K or beyond, with options for static white, tunable white, single colors, RGB, RGBW, and PIXEL.

02 LED qty

LED quantity can be adjusted for different lighting effects (18 LED/ft, 36 LED/ft, 72 LED/ft etc.)

03 Length

Length is customizable when quoted and ordered.

04 Feed Length

Feed length can be adjusted in the range of 0.328 ft to 98 ft or beyond (Longer feed length will lead to voltage drop depending on the installation. Consult Beamever or your construction team for more information).

05 End Cap

Injected end cap, silicone end cap, mechanical end cap are available (refer to spec sheets).

ELECTRICAL PARAMETERS

01 CRI

CRI can be adjusted from Ra80+ to Ra95+.

02 Efficacy

Efficacy is customizable if needed.

03 Power

Power can be adjusted within the maximum power as shown in the spec sheet (If the maximum power in the spec sheet is 4.57W/ft, the power below 4.57W/ft is customizable).

04 IP Rating

Different IP ratings are customizable (IP20, IP54, IP65, IP67 etc.)

PRODUCT CLASSIFICATION

11

PRODUCT

FLEXIBLE NEON



PAGE: 14-34

RIGID FIXTURES



PAGE: 37

LED TAPE




PAGE: 40-42

FLEXIBLE NEON

Diverse size options, lasting UV stability for outdoor, facade, landscape lighting etc.




NEON STATIC WHITE SERIES NAVIGATION MAP

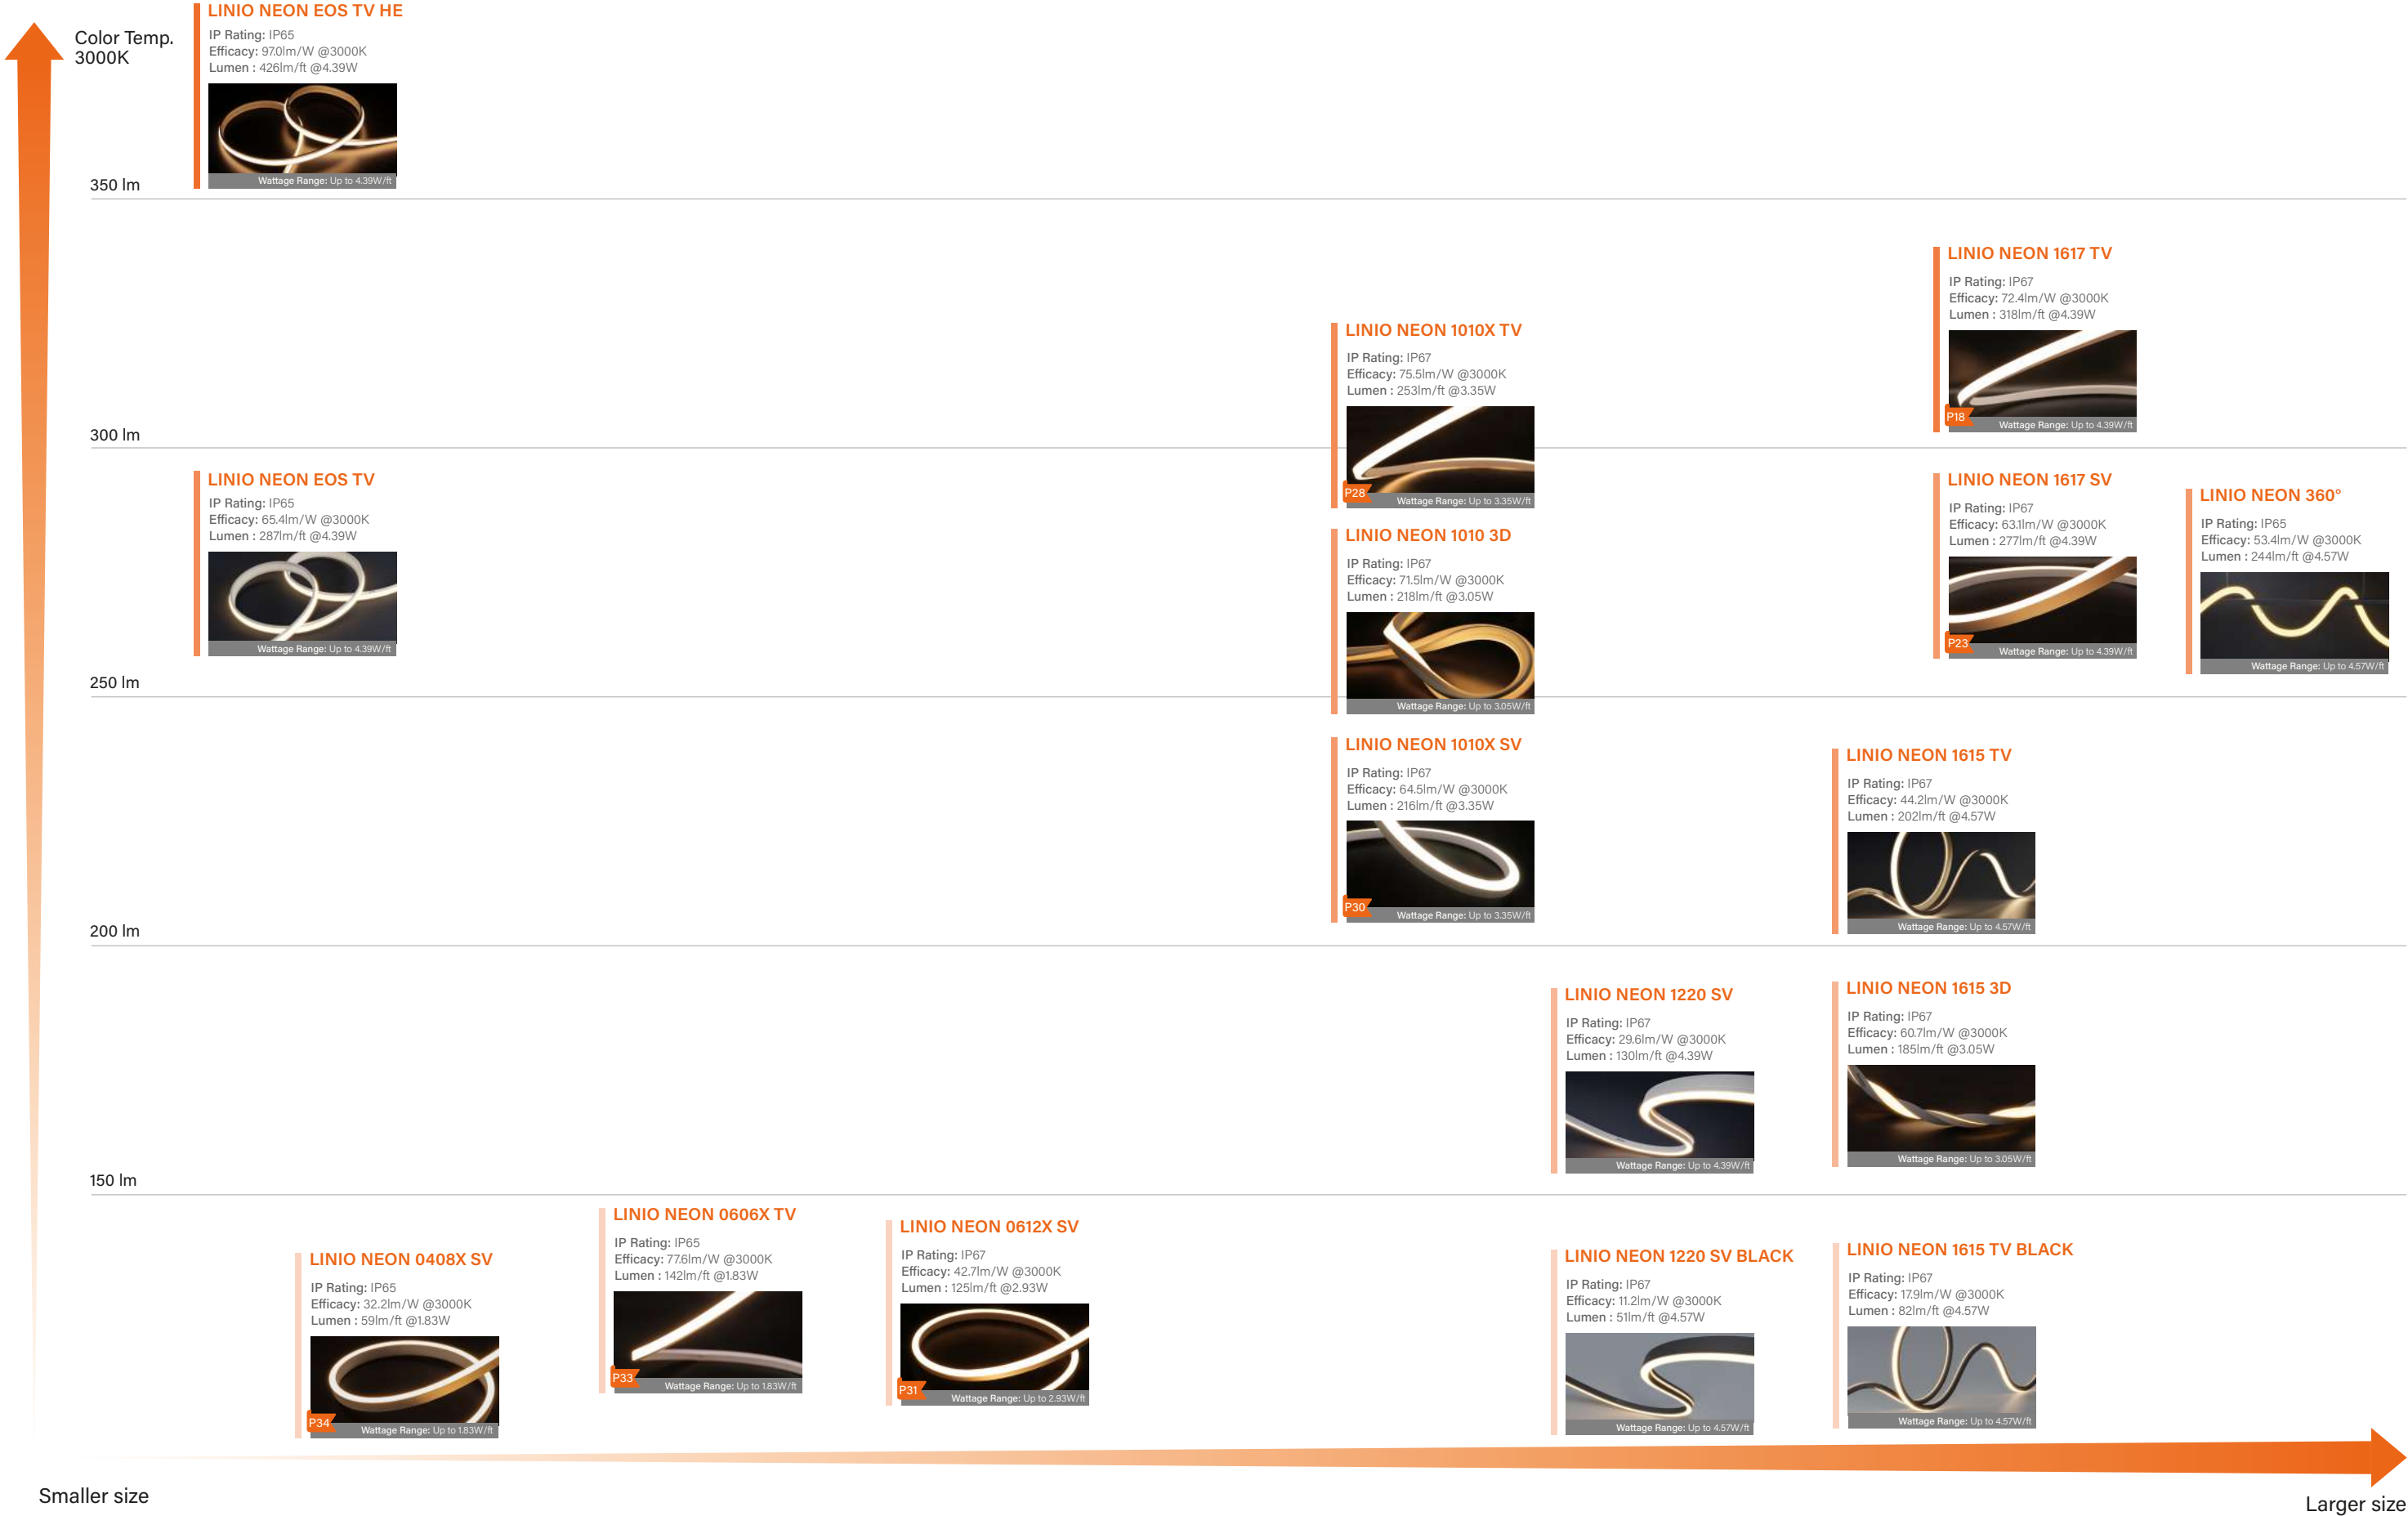

NEON DYNAMIC COLOR SERIES NAVIGATION MAP

	TUNABLE WHITE	RGB	RGBW	PIXEL RGBW (Addressable)
LINIO NEON EOS	LINIO NEON EOS TV HE TW IP Rating: IP65 Efficacy: 90.4lm/W @2700K+6500K Lumen : 375lm/ft @4.15W  Wattage Range: Up to 4.15W/ft	LINIO NEON EOS TV RGB IP Rating: IP65 Efficacy: 35lm/W @RGB Lumen : 160lm/ft @4.57W  Wattage Range: Up to 4.57W/ft	LINIO NEON EOS TV RGBW IP Rating: IP65 Efficacy: 43.1lm/W @RGBW (3000K) Lumen : 217lm/ft @5.03W  Wattage Range: Up to 5.03W/ft	LINIO NEON EOS TV PIXEL RGBW IP Rating: IP67 Efficacy: 36.9lm/W @PIXEL RGBW (3000K) Lumen : 107lm/ft @2.90W  Wattage Range: Up to 2.90W/ft
LINIO NEON 1617	LINIO NEON 1617 TV TW IP Rating: IP67 Efficacy: 62.4lm/W @2700K+5300K Lumen : 247lm/ft @3.96W  Wattage Range: Up to 3.69W/ft	LINIO NEON 1617 TV RGB IP Rating: IP67 Efficacy: 25.6lm/W @RGB Lumen : 100lm/ft @3.90W  Wattage Range: Up to 3.90W/ft	LINIO NEON 1617 TV RGBW IP Rating: IP67 Efficacy: 38lm/W @RGBW (3000K) Lumen : 197lm/ft @5.18W  Wattage Range: Up to 5.18W/ft	LINIO NEON 1617 TV PIXEL RGBW IP Rating: IP67 Efficacy: 31.5lm/W @PIXEL RGBW (3000K) Lumen : 144lm/ft @4.57W  Wattage Range: Up to 4.57W/ft
	LINIO NEON 1617 SV TW IP Rating: IP67 Efficacy: 52.5lm/W @2700K+5300K Lumen : 208lm/ft @3.96W  Wattage Range: Up to 3.69W/ft	LINIO NEON 1617 SV RGB IP Rating: IP67 Efficacy: 21.8lm/W @RGB Lumen : 85lm/ft @3.90W  Wattage Range: Up to 3.90W/ft	LINIO NEON 1617 SV RGBW IP Rating: IP67 Efficacy: 29.2lm/W @RGBW (3000K) Lumen : 151lm/ft @5.18W  Wattage Range: Up to 5.18W/ft	LINIO NEON 1617 SV PIXEL RGBW IP Rating: IP67 Efficacy: 21.4lm/W @PIXEL RGBW (3000K) Lumen : 98lm/ft @4.57W  Wattage Range: Up to 4.57W/ft
LINIO NEON 1615	LINIO NEON 1615 TV TW IP Rating: IP67 Efficacy: 44.6lm/W @2700K+5300K Lumen : 204lm/ft @4.57W  Wattage Range: Up to 4.57W/ft	LINIO NEON 1615 TV RGB IP Rating: IP67 Efficacy: 25.4lm/W @RGB Lumen : 85lm/ft @3.35W  Wattage Range: Up to 3.35W/ft	LINIO NEON 1615 TV RGBW IP Rating: IP67 Efficacy: 27.1lm/W @RGBW (3000K) Lumen : 124lm/ft @4.57W  Wattage Range: Up to 4.57W/ft	LINIO NEON 1615 TV PIXEL RGBW IP Rating: IP67 Efficacy: 25.5lm/W @PIXEL RGBW (3000K) Lumen : 109lm/ft @4.27W  Wattage Range: Up to 4.27W/ft
	LINIO NEON 1615 TV BLACK TW IP Rating: IP67 Efficacy: 16.4lm/W @2700K+6500K Lumen : 50lm/ft @3.05W  Wattage Range: Up to 3.05W/ft	LINIO NEON 1615 TV BLACK RGB IP Rating: IP67 Efficacy: 8.2lm/W @RGB Lumen : 25lm/ft @3.05W  Wattage Range: Up to 3.05W/ft		
LINIO NEON 1220	LINIO NEON 1220 SV TW IP Rating: IP67 Efficacy: 33.3lm/W @2700K+5300K Lumen : 152lm/ft @4.57W  Wattage Range: Up to 4.57W/ft	LINIO NEON 1220 SV RGB IP Rating: IP67 Efficacy: 14.6lm/W @RGB Lumen : 49lm/ft @3.35W  Wattage Range: Up to 3.35W/ft	LINIO NEON 1220 SV RGBW IP Rating: IP67 Efficacy: 17.7lm/W @RGBW (3000K) Lumen : 81lm/ft @4.57W  Wattage Range: Up to 4.57W/ft	LINIO NEON 1220 SV PIXEL RGBW IP Rating: IP67 Efficacy: 13.1lm/W @PIXEL RGBW (3000K) Lumen : 56lm/ft @4.27W  Wattage Range: Up to 4.27W/ft


	TUNABLE WHITE	RGB	RGBW	PIXEL RGBW (Addressable)
LINIO NEON 1010X	LINIO NEON 1010X TV TW IP Rating: IP67 Efficacy: 75.4lm/W @2700K+5300K Lumen : 267lm/ft @3.54W  Wattage Range: Up to 3.54W/ft			
LINIO NEON 0612X	LINIO NEON 0612X SV TW IP Rating: IP67 Efficacy: 43.4lm/W @2700K+5300K Lumen : 172lm/ft @3.96W  Wattage Range: Up to 3.96W/ft			
LINIO NEON 360°	LINIO NEON 360° TW IP Rating: IP65 Efficacy: 54.8lm/W @2700K+5000K Lumen : 167lm/ft @3.05W  Wattage Range: Up to 3.05W/ft	LINIO NEON 360° RGB IP Rating: IP65 Efficacy: 26.2lm/W @RGB Lumen : 80lm/ft @3.05W  Wattage Range: Up to 3.05W/ft	LINIO NEON 360° RGBW IP Rating: IP65 Efficacy: 29.9lm/W @RGBW (3000K) Lumen : 146lm/ft @4.88W  Wattage Range: Up to 4.88W/ft	

SERIES

LINIO NEON 1617 ▼	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 TV



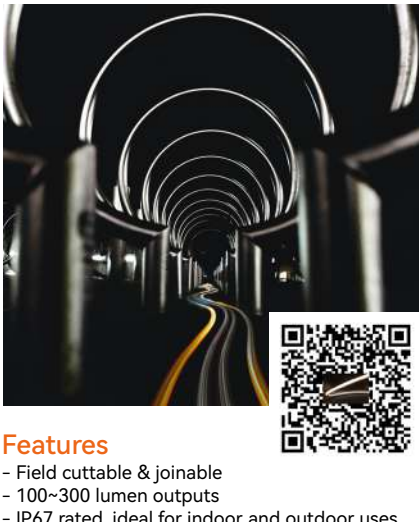

24V
DC

CRI
90+

IP67

ORIGINAL
FACTORY

Features

- Field cuttable & joinable
- 100~300 lumen outputs
- IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Vertical / top bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	1.46W	2.93W	4.39W
2200K	115	202	291
2700K	118	209	301
3000K	126	217	318
3500K	133	234	336
4000K	133	233	335
5300K	126	220	317
Max. Run Length	91.8 ft (168W)	65.6 ft (240W)	49.2 ft (270W)
Cut Interval	1.97 in	1.97 in	1.97 in

Max Run for Class 2 Low Voltage

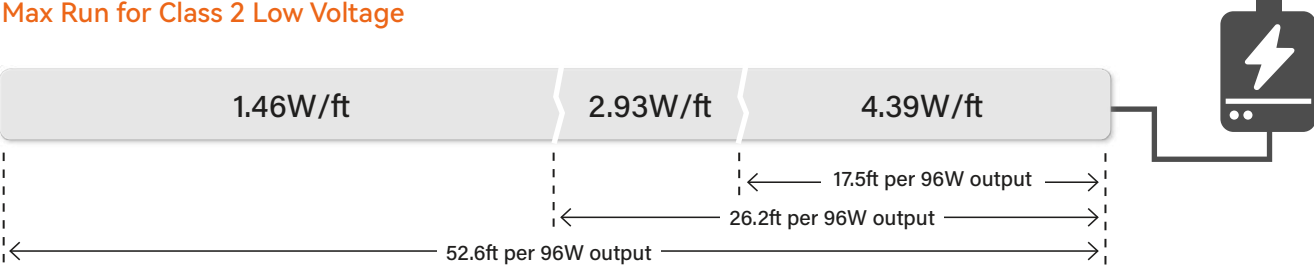

Compatible Channels

Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)


*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617 ▼	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 TV TW



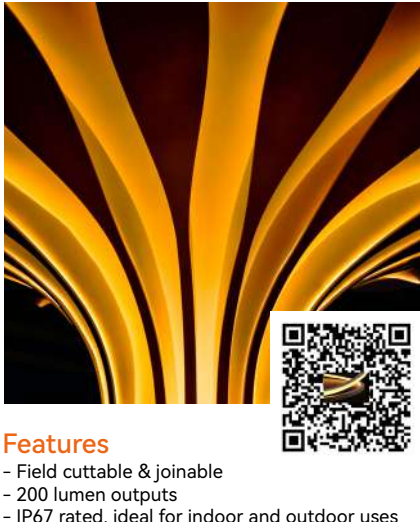

24V
DC

CRI
90+

IP67

ORIGINAL
FACTORY

Features

- Field cuttable & joinable
- 200 lumen outputs
- IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Vertical / top bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	3.96W
2700K	123
5300K	124
2700+5300K	247
Max. Run Length	49.2 ft (244W)
Cut Interval	2.81 in

Max Run for Class 2 Low Voltage

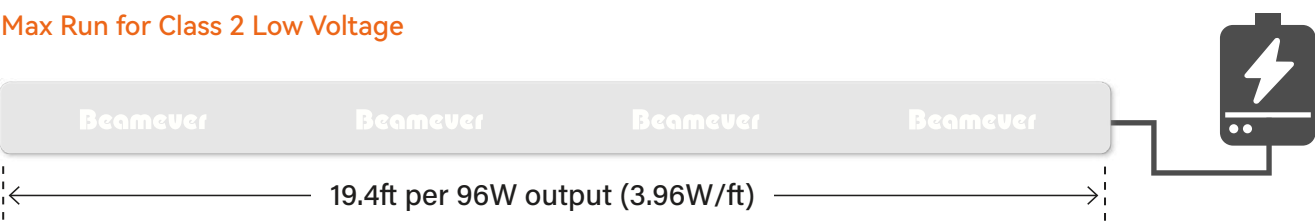

Compatible Channels


Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617 ▼	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 TV RGB

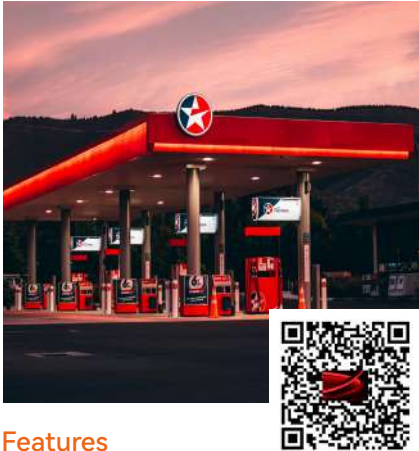

- Features**
- Field cuttable & joinable
 - 100 lumen outputs
 - IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Vertical / top bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	NA
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	3.90W
R	29
G	71
B	14
RGB	100
Max. Run Length	42.6 ft (208W)
Cut Interval	3.28 in

Max Run for Class 2 Low Voltage

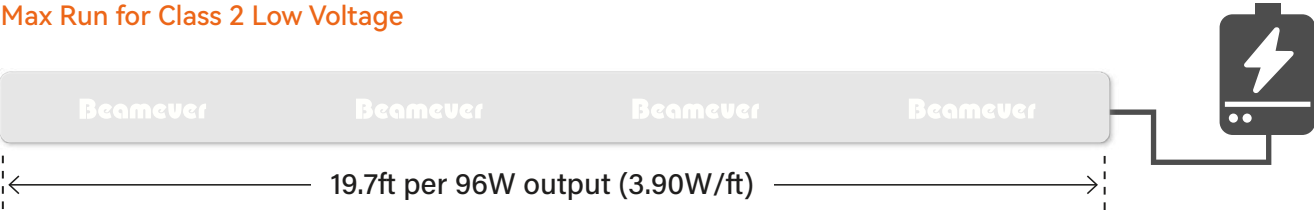

Compatible Channels

Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617 ▼	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 TV RGBW



- Features**
- Field cuttable & joinable
 - 200 lumen outputs
 - IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Vertical / top bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	Ra≥80
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	5.18W
R	26
G	73
B	17
W27	80
W30	87
W35	83
W40	83
RGBW27	191
RGBW30	197
RGBW35	194
RGBW40	194
Max. Run Length	29.5 ft (191W)
Cut Interval	3.28 in

Max Run for Class 2 Low Voltage

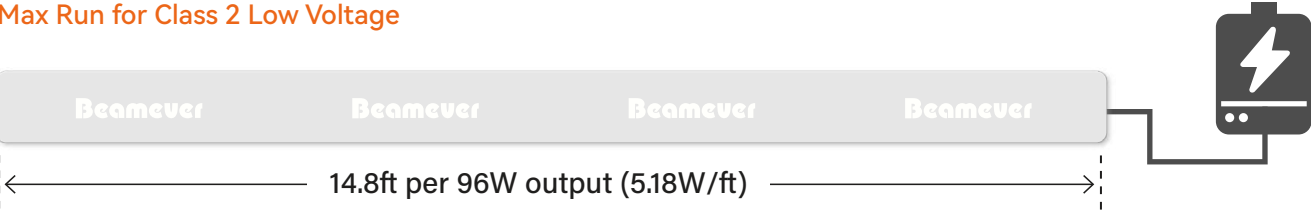

Compatible Channels

Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617 ▾	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 TV PIXEL RGBW





24V
DC

IP67

ORIGINAL
FACTORY

Features

- Field cuttable & joinable
- 100 lumen outputs
- IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Vertical / top bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	Ra≥80
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	4.57W
■ R	19
■ G	52
■ B	13
■ W27	59
■ W30	64
■ W35	65
■ W40	66
■ RGBW27	138
■ RGBW30	144
■ RGBW35	149
■ RGBW40	151
Max. Run Length	32.8 ft (275W)
Cut Interval	3.28 in

Max Run for Class 2 Low Voltage

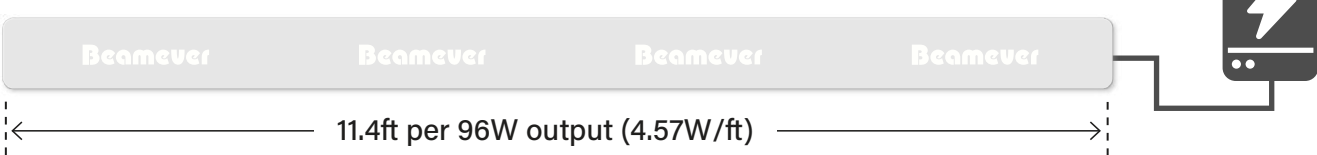

Compatible Channels

Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)


*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617 ▾	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 SV



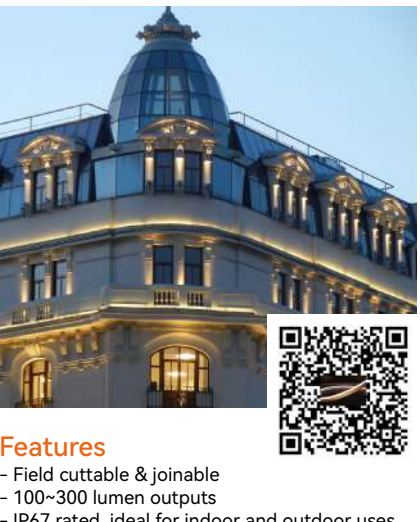

24V
DC

CRI
90+

IP67

ORIGINAL
FACTORY

Features

- Field cuttable & joinable
- 100~300 lumen outputs
- IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Horizontal / side bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	1.46W	2.93W	4.39W
■ 2200K	84	141	244
■ 2700K	92	155	258
■ 3000K	99	166	277
■ 3500K	102	171	283
■ 4000K	99	166	277
■ 5300K	92	155	294
Max. Run Length	91.8 ft (168W)	65.6 ft (240W)	49.2 ft (270W)
Cut Interval	1.97 in	1.97 in	1.97 in

Max Run for Class 2 Low Voltage

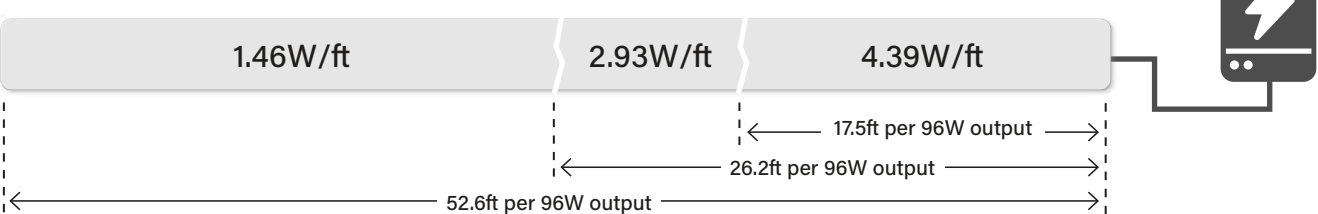

Compatible Channels

Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617 ▼	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 SV TW



- Features
- Field cuttable & joinable
 - 200 lumen outputs
 - IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Horizontal / side bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	3.96W
2700K	104
5300K	105
2700+5300K	208
Max. Run Length	49.2 ft (244W)
Cut Interval	2.81 in

Max Run for Class 2 Low Voltage

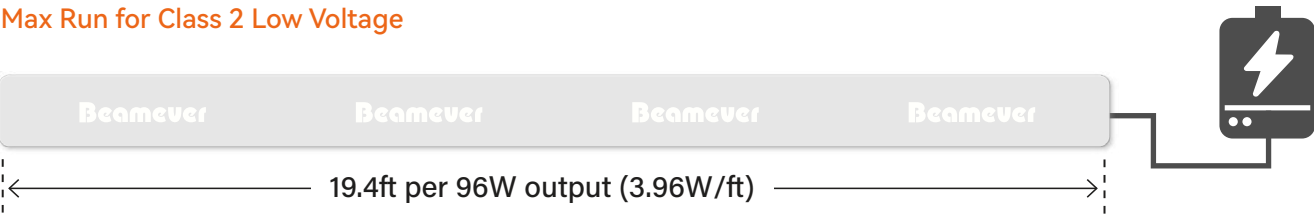

Compatible Channels

Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617 ▼	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 SV RGB



- Features
- Field cuttable & joinable
 - 100 lumen outputs
 - IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Horizontal / side bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	NA
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	3.90W
R	21
G	55
B	11
RGB	85
Max. Run Length	42.6 ft (208W)
Cut Interval	3.28 in

Max Run for Class 2 Low Voltage

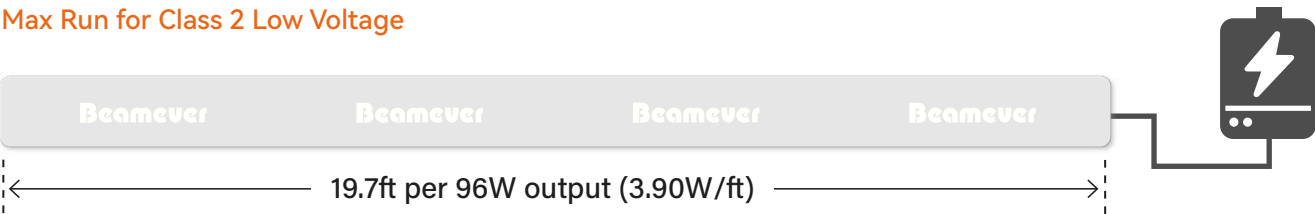

Compatible Channels

Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617 ▾	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 SV RGBW



- Features**
- Field cuttable & joinable
 - 100 lumen outputs
 - IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Horizontal / side bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	Ra≥80
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	5.18W
R	19
G	56
B	13
W27	62
W30	66
W35	68
W40	69
RGBW27	148
RGBW30	151
RGBW35	151
RGBW40	153
Max. Run Length	29.5 ft (191W)
Cut Interval	3.28 in

Max Run for Class 2 Low Voltage

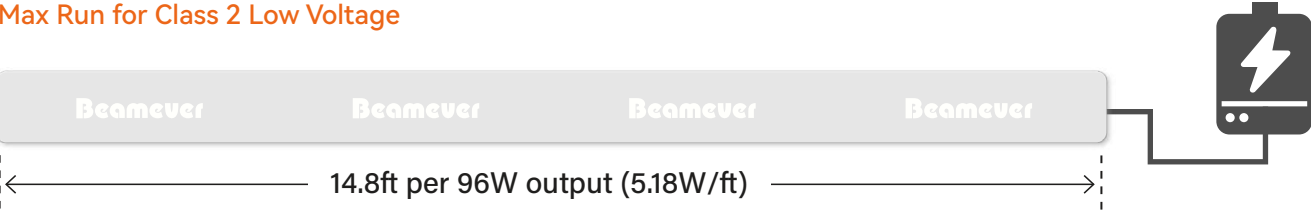

Compatible Channels

Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617 ▾	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-------------------	------------------	------------------	------------------	------------------

LINIO NEON 1617 SV PIXEL RGBW



- Features**
- Field cuttable & joinable
 - 100 lumen outputs
 - IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Horizontal / side bend
Voltage	24VDC
Dimension	0.63 in x 0.67 in
CRI	Ra≥80
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	4.57W
R	13
G	35
B	10
W27	40
W30	43
W35	44
W40	44
RGBW27	94
RGBW30	98
RGBW35	98
RGBW40	99
Max. Run Length	32.8 ft (275W)
Cut Interval	3.28 in

Max Run for Class 2 Low Voltage

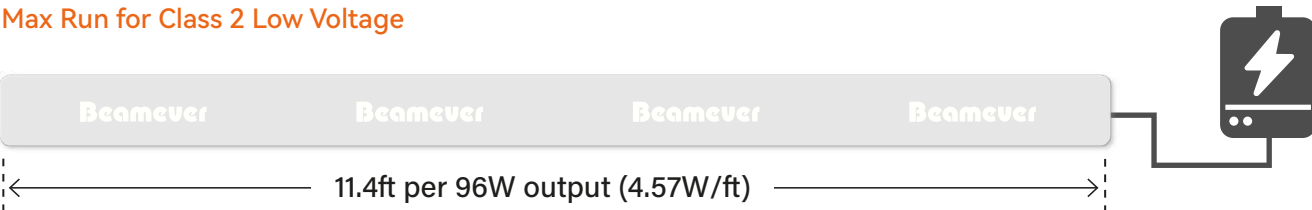

Compatible Channels

Surface Channel (LN1617-SC)	Bendable Surface Channel (LN1617-BC)	Recessed Channel (LN1617-RC)	Mud-in Channel (LN1617-MC)	Bendable Mud-in Channel (LN1617-BMC)	Mounting Clip (LN1617-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617	LINIO NEON 1010X▼	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-----------------	-------------------	------------------	------------------	------------------

LINIO NEON 1010X TV



24V
DC

CRI
90+

IP67

ORIGINAL
FACTORY

- Features
- Field cuttable & joinable
 - 200 lumen outputs
 - IP67 rated, ideal for indoor and outdoor uses
 - 3-side emitting


Specs

Bending Direction	Vertical / top bend
Voltage	24VDC
Dimension	0.39 in x 0.39 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	3.35W
2200K	246
2700K	251
3000K	253
3500K	253
4000K	257
5300K	249
Max. Run Length	32.8 ft (137W)
Cut Interval	1.64 in

Max Run for Class 2 Low Voltage

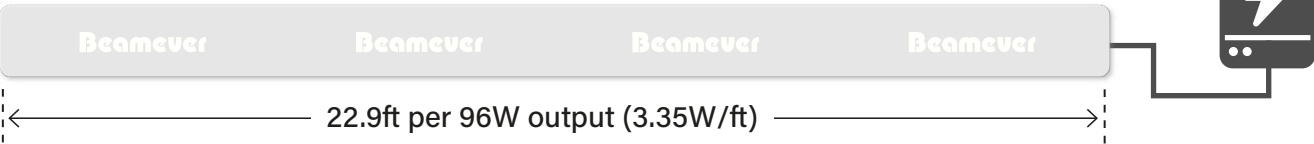

Compatible Channels

Surface Channel (LN1010-SC)	Bendable Channel (LN1010-BC)	PC Channel (LN1010-PC)	Mud-in Channel (LN1010-MC)	Inside Corner Channel (LN1010-IC)
Outside Corner Channel (LN1010-OC)	Skirting Board Channel (LN1010-SBC)	Mounting Clip (LN1010-CL)		

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617	LINIO NEON 1010X▼	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-----------------	-------------------	------------------	------------------	------------------

LINIO NEON 1010X TV TW



24V
DC

CRI
90+

IP67

ORIGINAL
FACTORY

- Features
- Field cuttable & joinable
 - 200 lumen outputs
 - IP67 rated, ideal for indoor and outdoor uses
 - 3-side emitting


Specs

Bending Direction	Vertical / top bend
Voltage	24VDC
Dimension	0.39 in x 0.39 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	3.54W
2700K	125
5300K	133
2700K+5300K	267
Max. Run Length	32.8 ft (145W)
Cut Interval	1.64 in

Max Run for Class 2 Low Voltage

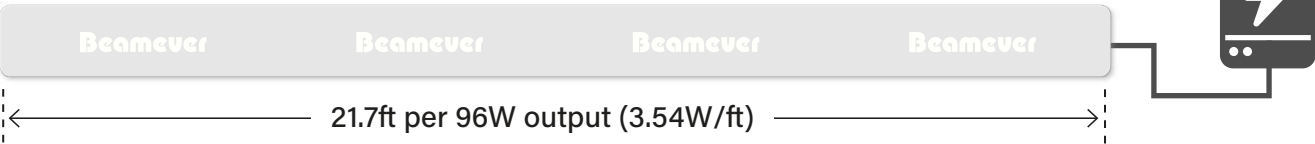

Compatible Channels

Surface Channel (LN1010-SC)	Bendable Channel (LN1010-BC)	PC Channel (LN1010-PC)	Mud-in Channel (LN1010-MC)	Inside Corner Channel (LN1010-IC)
Outside Corner Channel (LN1010-OC)	Skirting Board Channel (LN1010-SBC)	Mounting Clip (LN1010-CL)		

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617	LINIO NEON 1010X ▼	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X
-----------------	--------------------	------------------	------------------	------------------

LINIO NEON 1010X SV



Features

- Field cuttable & joinable
- 200 lumen outputs
- IP67 rated, ideal for indoor and outdoor uses




Specs

Bending Direction	Horizontal / side bend
Voltage	24VDC
Dimension	0.39 in x 0.39 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	3.35W
2200K	183
2700K	201
3000K	216
3500K	224
4000K	229
5300K	232
Max. Run Length	26.2 ft (110W)
Cut Interval	1.64 in

Max Run for Class 2 Low Voltage

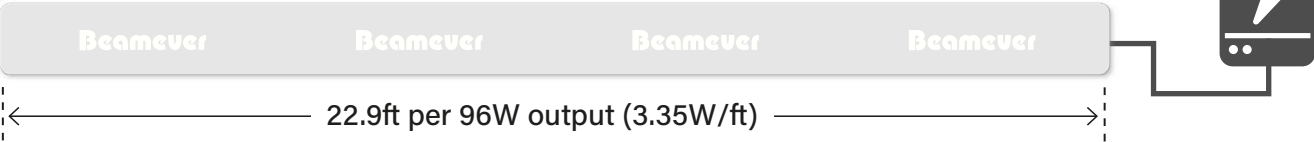

Compatible Channels

Surface Channel (LN1010-SC)	Bendable Channel (LN1010-BC)	PC Channel (LN1010-PC)	Mud-in Channel (LN1010-MC)	Inside Corner Channel (LN1010-IC)
Outside Corner Channel (LN1010-OC)	Skirting Board Channel (LN1010-SBC)	Mounting Clip (LN1010-CL)		

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617	LINIO NEON 1010X	LINIO NEON 0612X ▼	LINIO NEON 0606X	LINIO NEON 0408X
-----------------	------------------	--------------------	------------------	------------------

LINIO NEON 0612X SV



Features

- Field cuttable & joinable
- 100 lumen outputs
- IP67 rated, ideal for indoor and outdoor use




Specs

Bending Direction	Horizontal / side bend
Voltage	24VDC
Dimension	0.27 in x 0.47 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	2.93W
2200K	103
2700K	116
3000K	125
3500K	125
4000K	120
5300K	116
Max. Run Length	39.4 ft (144W)
Cut Interval	1.97 in

Max Run for Class 2 Low Voltage

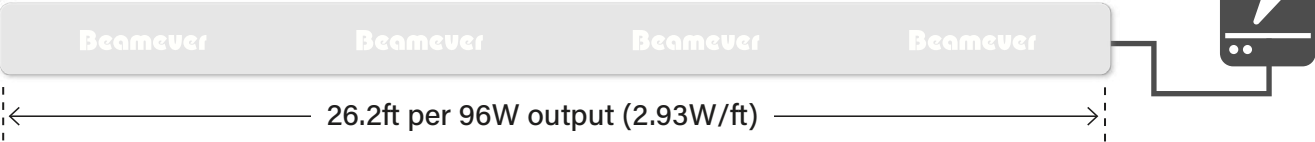

Compatible Channels


Surface Channel (LN0612-SC)	Mounting Clip (LN0612-CL)
-----------------------------	---------------------------

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617	LINIO NEON 1010X	LINIO NEON 0612X ▼	LINIO NEON 0606X	LINIO NEON 0408X
-----------------	------------------	--------------------	------------------	------------------

LINIO NEON 0612X SV TW

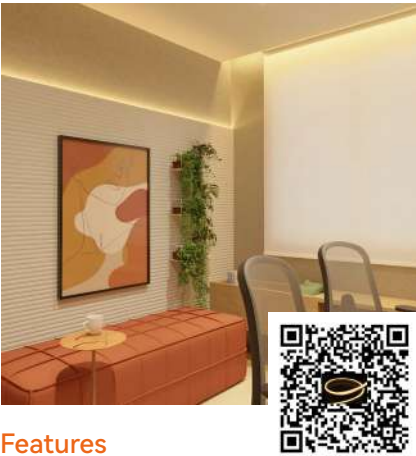

- Features
- Field cuttable & joinable
 - 100 lumen outputs
 - IP67 rated, ideal for indoor and outdoor uses


Specs

Bending Direction	Horizontal / side bend
Voltage	24VDC
Dimension	0.27 in x 0.47 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	3.96W
2700K	85
5300K	89
2700K+5300K	172
Max. Run Length	32.8 ft (162W)
Cut Interval	2.81 in

Max Run for Class 2 Low Voltage

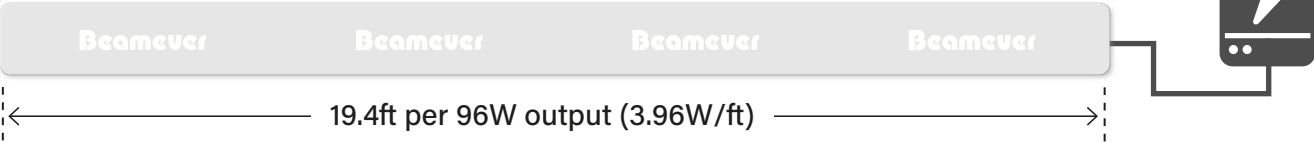

Compatible Channels


Surface Channel (LN0612-SC)	Mounting Clip (LN0612-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X ▼	LINIO NEON 0408X
-----------------	------------------	------------------	--------------------	------------------

LINIO NEON 0606X TV

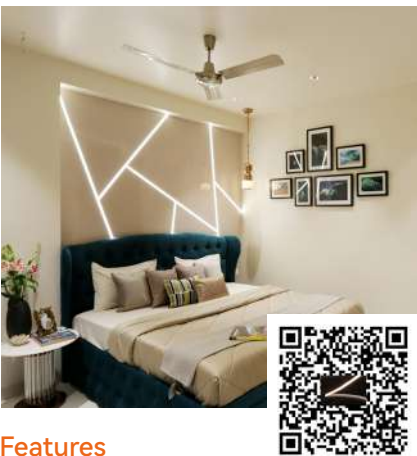

- Features
- Field cuttable & joinable
 - 100 lumen outputs
 - IP65 rated, ideal for indoor uses


Specs

Bending Direction	Vertical / top bend
Voltage	24VDC
Dimension	0.24 in x 0.24 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	1.83W
2200K	109
2700K	132
3000K	142
3500K	140
4000K	145
5700K	134
Max. Run Length	23 ft (53W)
Cut Interval	0.98 in

Max Run for Class 2 Low Voltage

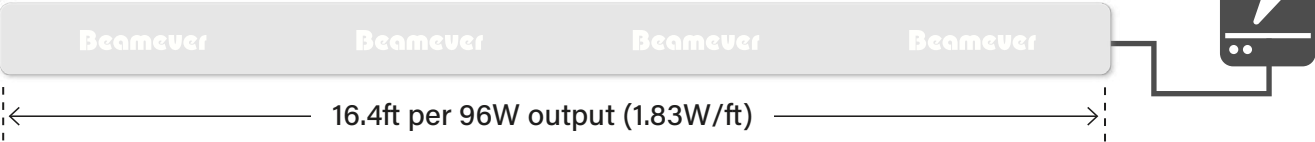

Compatible Channels


Surface Channel (LN0606-SC)	Mounting Clip (LN0606-CL)

*All power requirements on this page include an 80% power supply buffer.

SERIES

LINIO NEON 1617	LINIO NEON 1010X	LINIO NEON 0612X	LINIO NEON 0606X	LINIO NEON 0408X ▼
-----------------	------------------	------------------	------------------	--------------------

LINIO NEON 0408X SV

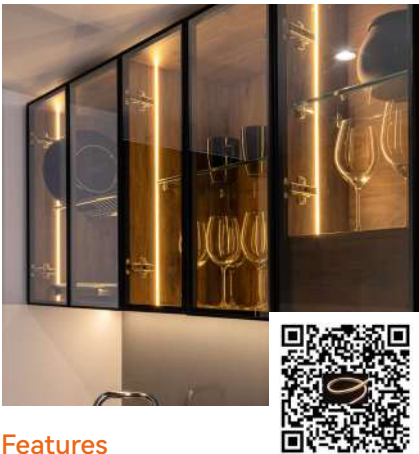

- Features
- Field cuttable & joinable
 - 100 lumen outputs
 - IP65 rated, ideal for indoor uses


Specs

Bending Direction	Horizontal / side bend
Voltage	24VDC
Dimension	0.16 in x 0.31 in
CRI	Ra≥90
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	1.83W
2400K	49
2700K	55
3000K	59
3500K	59
4000K	57
5300K	55
Max. Run Length	16.4 ft (38W)
Cut Interval	1.97 in

Max Run for Class 2 Low Voltage

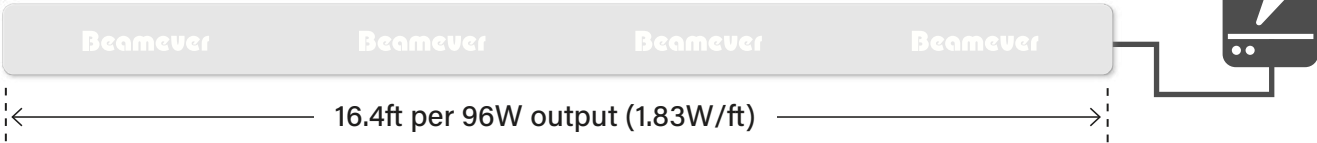

Compatible Channels

Surface Channel (LN0408-SC)	Mounting Clip (LN0408-CL)

*All power requirements on this page include an 80% power supply buffer.





RIGID FIXTURES

Multiple options offering versatile, stylish and durable lighting solutions

FIT EOS SURFACE



- Features**
- 400 lumen outputs
 - IP65 rated, ideal for indoor uses


Specs

Length Options	0.98 ft/3.28 ft/6.56 ft
Voltage	24VDC
Dimension	0.54 in x 0.74 in
CRI	Ra≥80
Warranty	5 years
Dimming	Dimmable
Environment	Dry/damp/wet
Certification	UL

Lumen

Lumen/ft	2.93W
2200K	379
2700K	391
3000K	403
3500K	409
4000K	418
5700K	397
Max. Run Length	16.4 ft (60W)
Cut Interval	1.97 in

Max Run for Class 2 Low Voltage

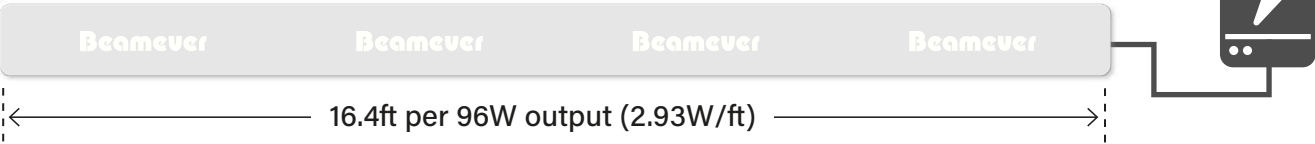

Compatible Channels

Mounting Clip (FTEOSS-CL)	Adjustable Clip (FTEOSS-AC)

*All power requirements on this page include an 80% power supply buffer.

LED TAPE

Slim, dotless, for interior lighting,
under cabinet lighting etc.



LED TAPE STATIC WHITE SERIES NAVIGATION MAP

Color Temp.3000K

ALTA TAPE ULTRA

IP Rating: IP20
Efficacy: 131.4lm/W @3000K
Lumen : 1122lm/ft @8.54W




Wattage Range: Up to 8.54W/ft

800 lm

AERO TAPE WET

IP Rating: IP65
Efficacy: 88.0lm/W @3000K
Lumen : 644lm/ft @7.32W



Wattage Range: Up to 7.32W/ft

AERO TAPE HD WET X

IP Rating: IP67
Efficacy: 88.1lm/W @3000K
Lumen : 645lm/ft @7.32W



Wattage Range: Up to 7.32W/ft

AERO TAPE HD WET

IP Rating: IP65
Efficacy: 90.0lm/W @3000K
Lumen : 659lm/ft @7.32W



Wattage Range: Up to 7.32W/ft

AERO TAPE

IP Rating: IP20
Efficacy: 94.3lm/W @3000K
Lumen : 690lm/ft @7.32W



Wattage Range: Up to 7.32W/ft

AERO TAPE HD

IP Rating: IP20
Efficacy: 94.7lm/W @3000K
Lumen : 693lm/ft @7.32W



Wattage Range: Up to 7.32W/ft

600 lm

AERO TAPE LONG RUN

IP Rating: IP20
Efficacy: 97.6lm/W @3000K
Lumen : 446lm/ft @4.57W



Wattage Range: Up to 4.57W/ft

ANNO TAPE

IP Rating: IP20
Efficacy: 98.7lm/W @3000K
Lumen : 451lm/ft @4.57W



Wattage Range: Up to 4.57W/ft

AERO TAPE WET X


IP Rating: IP67
Efficacy: 75.5lm/W @3000K
Lumen : 553lm/ft @7.32W



Wattage Range: Up to 7.32W/ft

AERO TAPE FREE CUT


IP Rating: IP20
Efficacy: 95.8lm/W @3000K
Lumen : 409lm/ft @4.27W



Wattage Range: Up to 4.27W/ft

AERO TAPE ECO

IP Rating: IP20
Efficacy: 93.2lm/W @3000K
Lumen : 409lm/ft @4.39W



Wattage Range: Up to 4.39W/ft

AERO TAPE LONG RUN WET X

IP Rating: IP67
Efficacy: 90.8lm/W @3000K
Lumen : 415lm/ft @4.57W



Wattage Range: Up to 4.57W/ft

ANNO TAPE WET X

IP Rating: IP67
Efficacy: 92.5lm/W @3000K
Lumen : 418lm/ft @4.57W



Wattage Range: Up to 4.57W/ft

ANNO TAPE PRO

IP Rating: IP20
Efficacy: 92.1lm/W @3000K
Lumen : 421lm/ft @4.57W



Wattage Range: Up to 4.57W/ft

AERO TAPE LONG RUN WET

IP Rating: IP65
Efficacy: 92.8lm/W @3000K
Lumen : 424lm/ft @4.57W



Wattage Range: Up to 4.57W/ft

ALTA TAPE

IP Rating: IP20
Efficacy: 72.8lm/W @3000K
Lumen : 426lm/ft @5.85W



Wattage Range: Up to 5.85W/ft

ANNO TAPE WET

IP Rating: IP65
Efficacy: 96.1lm/W @3000K
Lumen : 439lm/ft @4.57W



Wattage Range: Up to 4.57W/ft

400 lm

ANNO TAPE FREE CUT

IP Rating: IP20
Efficacy: 50.2lm/W @3000K
Lumen : 153lm/ft @3.05W



Wattage Range: Up to 3.05W/ft

ANNO TAPE S

IP Rating: IP20
Efficacy: 103.3lm/W @3000K
Lumen : 157lm/ft @1.52W



Wattage Range: Up to 1.52W/ft

ANNO TAPE LONG RUN

IP Rating: IP20
Efficacy: 74.6lm/W @3000K
Lumen : 159lm/ft @2.13W



Wattage Range: Up to 2.13W/ft

ANNO TAPE SV

IP Rating: IP20
Efficacy: 68.9lm/W @3000K
Lumen : 210lm/ft @3.05W



Wattage Range: Up to 3.05W/ft

AERO TAPE SAUNA

IP Rating: IP65
Efficacy: 120.5lm/W @3000K
Lumen : 353lm/ft @2.93W



Wattage Range: Up to 2.93W/ft

AERO TAPE TRUE

IP Rating: IP65
Efficacy: 82.1lm/W @3000K
Lumen : 375lm/ft @4.57W




Wattage Range: Up to 4.57W/ft

Lower Lumen Output

Higher Lumen Output

LED TAPE DYNAMIC COLOR SERIES NAVIGATION MAP

	TUNABLE WHITE	RGB	RGBW	RGBWW
ANNO TAPE PRO	ANNO TAPE PRO TW IP Rating: IP20 Efficacy: 89.2lm/W @2700K+6500K Lumen : 272lm/ft @3.05W  Wattage Range: Up to 3.05W/ft	ANNO TAPE PRO RGB IP Rating: IP20 Efficacy: 40.0lm/W @RGB Lumen : 183lm/ft @4.57W  Wattage Range: Up to 4.57W/ft	ANNO TAPE PRO RGBW IP Rating: IP20 Efficacy: 50.6lm/W @RGBW (3000K) Lumen : 247lm/ft @4.88W  Wattage Range: Up to 4.88W/ft	ANNO TAPE PRO RGBWW IP Rating: IP20 Efficacy: 48.8lm/W @RGBWW (2700K+6500K) Lumen : 238lm/ft @4.88W  Wattage Range: Up to 4.88W/ft
ANNO TAPE	ANNO TAPE TW IP Rating: IP20 Efficacy: 99.3lm/W @2700K+6500K Lumen : 454lm/ft @4.57W  Wattage Range: Up to 4.57W/ft	ANNO TAPE RGB IP Rating: IP20 Efficacy: 38.3lm/W @RGB Lumen : 175lm/ft @4.57W  Wattage Range: Up to 4.57W/ft	ANNO TAPE RGBW IP Rating: IP20 Efficacy: 49.4lm/W @RGBW (3000K) Lumen : 241lm/ft @4.88W  Wattage Range: Up to 4.88W/ft	ANNO TAPE RGBWW IP Rating: IP20 Efficacy: 55.5lm/W @RGBWW (2700K+6500K) Lumen : 271lm/ft @4.88W  Wattage Range: Up to 4.88W/ft
AERO TAPE	AERO TAPE TW IP Rating: IP20 Efficacy: 77.5lm/W @2700K+6500K Lumen : 567lm/ft @7.32W  Wattage Range: Up to 7.32W/ft			



UNIVERSAL NAVIGATION MAP



ARCHITECTURAL NAVIGATION MAP



SPECIAL CHANNEL PROFILES NAVIGATION MAP



UNIVERSAL CHANNEL PROFILES

TAPE-CHANNEL COMPATIBILITY CHART



	AERO TAPE	AERO TAPE DTW	AERO TAPE HD	AERO TAPE MIRROR	AERO TAPE WET	AERO TAPE WET X	ALTA TAPE ULTRA	BELA TAPE RGBW	ANNO TAPE	ANNO TAPE DTW	ANNO TAPE S	ANNO TAPE LONG RUN	ANNO TAPE FREE CUT	ANNO TAPE SV
BE1015													SLIGHT	
BE1615													SLIGHT	
BE1215	NO	NO	NO	NO			NO		NO	NO		NO	NO	
BE1815	NO	NO	NO	NO			NO		NO	NO		NO	NO	
BE1415	NO	NO	NO	NO			NO	SLIGHT	NO	NO		NO		
BE2015	NO	NO	NO	NO			NO	SLIGHT	NO	NO		NO		
BE1202	NO	NO	NO	NO			NO	SLIGHT	NO	NO		NO		
BE1201	NO	NO	NO	NO			NO	SLIGHT	NO	NO		NO		
BE1207	NO	NO	NO	NO			NO	SLIGHT	NO	NO		NO		
BE1910								SLIGHT						
BE2810								SLIGHT						
BE1101	SLIGHT	SLIGHT	NO	SLIGHT			NO		NO	NO		NO		
BE1203	SLIGHT	SLIGHT	NO	SLIGHT			NO	SLIGHT						
BE1602													NO	
BE2020	SLIGHT	SLIGHT	NO	SLIGHT			NO	SLIGHT	NO	NO		NO		
BE1206	SLIGHT	SLIGHT	NO	SLIGHT			NO	SLIGHT						
BE1001	SLIGHT	SLIGHT	NO	SLIGHT			NO			NO		NO	NO	
BE1002	SLIGHT	NO	SLIGHT	SLIGHT			NO			SLIGHT		NO	NO	

* Above list contains the most popular channels of Beamever. We have a variety of channel options. Contact Beamever at info@beamever.com for more information.

ARCHITECTURAL CHANNEL PROFILES

TAPE-CHANNEL COMPATIBILITY CHART



	AERO TAPE	AERO TAPE DTW	AERO TAPE HD	AERO TAPE MIRROR	AERO TAPE WET	AERO TAPE WET X	ALTA TAPE ULTRA	BELA TAPE RGBW	ANNO TAPE	ANNO TAPE DTW	ANNO TAPE S	ANNO TAPE LONG RUN	ANNO TAPE FREE CUT	ANNO TAPE SV
BE5615	NO	NO	NO	NO			NO	SLIGHT	NO	NO		NO		
BE7615	NO	NO	NO	NO	SLIGHT	SLIGHT	NO	SLIGHT	NO	NO		NO	NO	
BE5315	NO	NO	NO	NO			NO	SLIGHT	NO	NO		NO		
BE4615	NO	NO	NO	NO			NO	SLIGHT	NO	NO		NO		
BE5035	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO		NO	NO	
BE3535	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO		NO	NO	
BE5075	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO		NO	NO	
BE6575	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO		NO	NO	
BE3523													NO	
BE2601	SLIGHT	SLIGHT	SLIGHT	SLIGHT	SLIGHT	SLIGHT	SLIGHT	SLIGHT	SLIGHT	SLIGHT		SLIGHT	SLIGHT	
BE8833	NO	NO	NO	NO			NO		NO	NO		NO	NO	

* Above list contains the most popular channels of Beamever. We have a variety of channel options. Contact Beamever at info@beamever.com for more information.

SPECIAL CHANNEL PROFILES

TAPE-CHANNEL COMPATIBILITY CHART



	AERO TAPE	AERO TAPE DTW	AERO TAPE HD	AERO TAPE MIRROR	AERO TAPE WET	AERO TAPE WET X	ALTA TAPE ULTRA	BELA TAPE RGBW	ANNO TAPE	ANNO TAPE DTW	ANNO TAPE S	ANNO TAPE LONG RUN	ANNO TAPE FREE CUT	ANNO TAPE SV
BE2009														
BE3511														
BE9151														
BE13350														
BE1402														
BE09														
BE078														
BE9358														
BE60														
BE6728														
BE6826														
BE12017														
BE6919														
BE1403														
BE2003														
BE2004														
BE3030R														
BE3030S														

* Above list contains the most popular channels of Beamever. We have a variety of channel options. Contact Beamever at info@beamever.com for more information.





NEW
PERSPECTIVES
ON SCANDINAVIAN
DESIGN

GERA

DESIGN